



BATHROOM AND DESIGN RADIATORS








TECHNICAL
CATALOGUE
2012



CONTENS

Tailored radiators	4
Product range	
Bathroom design radiators CHROME	6
NEW Drito Inox	8
NEW Elida Inox	9
NEW Square Inox	10
NEW Piani Inox	11
NEW Calypso Inox	12
NEW Calypso Radius Inox	13
NEW Calypso CHROME	14
NEW Calypso Radius CHROME	15
NEW Scelta Glass	16
NEW Scelta Mirror	17
Scelta Plan	18
Moderno	19
Simetria , Simetria Double	20
Simetria Mirror, Simetria Light	21
Cubo , Cubo Double	22
Aribo, Aribo Double	23
Domino	24
Domino Light, Domino Double	25
Pulito	26
Universale 10 V, Universale 10 L	27
Simetria Double Horizontal	28
Universale 10 H, Universale 20 H	29
Aribo Double Horizontal	30
Domino Double Horizontal	31
Quadrato	32
NEW Firenze	33

Ikaro	34
Ikaro Radius	35
Ikaro Double	36
Toro, Toro Plus, Toro Extra	37
Panel Light	38
Panel Plus , Panel Plus Double	39
Giulia	40
NEW Fila, Filo	41
Tizio	42
Tizio Radius	43
Calypso Plus	44
NEW Calypso Valve	45
Saphiro	46
Saphiro Plus	47
Polo	48
Polo Radius	49
Alumio	50
General information on bathroom design radiators	51
Bathroom radiators ordering	52
U10V & U20V radiators ordering	53
Tailored radiators	54
Tailored radiators and modification options	55
Electrical connections	56
Regulation units	57
Combined heating kit and one-sided spatial fixing	58
Bathroom accessories	59
Thermostatic heads and valves	61
Colours	62



THE FOLLOWING SYMBOLS REPRESENT

	radiator to be connected to central heating system		optional chrome surface treatment design		electric radiator		combined heating radiators can also be used for connection to central heating system and also for electric heating
	middle connection option (if not covered in the standard version)		stainless steel heating body		bathroom accessories		
	side connection		bevelled		one-sided spatial fixing		



SCELTA GLASS 1810×620



TAILORED RADIATORS



Any client may submit its own project for a TAILORED AG RADIATOR to be adapted to the concrete building disposition and client's needs or demands. Please, specify dimensions, colour and connection type of the heating body. Selected AG radiator types may be used within the combined heating system or as individual electric appliances only.

- Demanded dimensions
- Chosen connection type
- Colour as per the AG Reference Colour Atlas
- Chrome surface treatment
- Stainless steel AG radiators
- AG radiator as an individual electric appliance
- AG combi-radiators
- One-sided spatial fixed AG radiators

For more details, please see the page 54 or contact the AG sales department.



ELECTRIC RADIATORS



CONNECTION OPTIONS
side / bottom



RADIATOR WITH A STYLISH COVER



Looking for non-traditional solution and want to live in the interior according to your own ideas?

You can have your own tailor made radiator.

You can only send your motive (picture, photo or your draft) which you would like to have on your radiator electronically on our e-mail.

The only condition is to provide the picture with minimum 300 dpi.

You will be pleased and warmed by the metallic decorative cover with motive according to your wish.

The covers are placed on the radiators Scelta type (page 18). Please select the size and we will arrange the rest.

INSTRUCTION FOR ORDERING TAILOR MADE RADIATOR:

STEP 1

Send your idea (drawing, photo or ornament) to sklep@aggrzejnikidesign.pl

STEP 2

You will be contacted by AG contact person to agree the final view, output, price, the delivery time etc.

STEP 3


You will be fully informed about the finishing of the production and delivery.

MANUFACTURING PROCESS OF TAILOR MADE RADIATOR



PRINTING SAMPLES

SAMPLES CUTTING

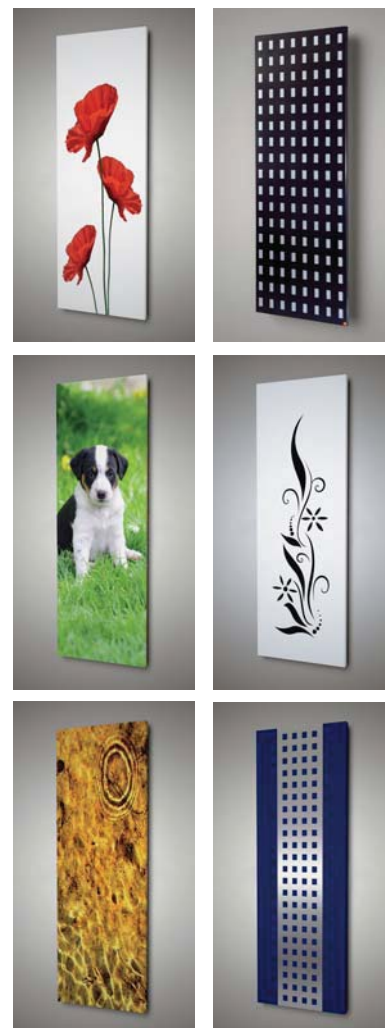

BATHROOM RADIATORS CHROME



CALYPSO CHROME



page 14

CALYPSO RADIUS CHROME



page 15

PULITO CHROME



page 26

QUADRATO CHROME



page 32

IKARO CHROME



page 34

IKARO RADIUS CHROME



page 35

TIZIO CHROME



page 42

TIZIO RADIUS CHROME



page 43

CALYPSO PLUS CHROME



page 44

BATHROOM RADIATORS CHROME



SAPHIRO CHROME



page 46

SAPHIRO PLUS CHROME



page 47

POLO CHROME



page 48

POLO RADIUS CHROME



page 49

ALUMIO CHROME




page 50

NEW




MIDDLE CONNECTION WITH COVER
page 14, 15, 42, 43, 48, 49, 50



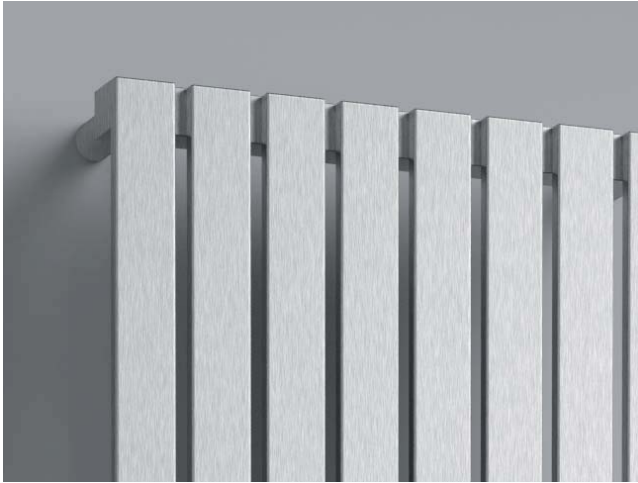

DRITO INOX


Material	stainless steel profiles 30 × 30 mm stainless steel profiles 40 × 10 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of profiles	8
Surface treatment	brushed stainless steel

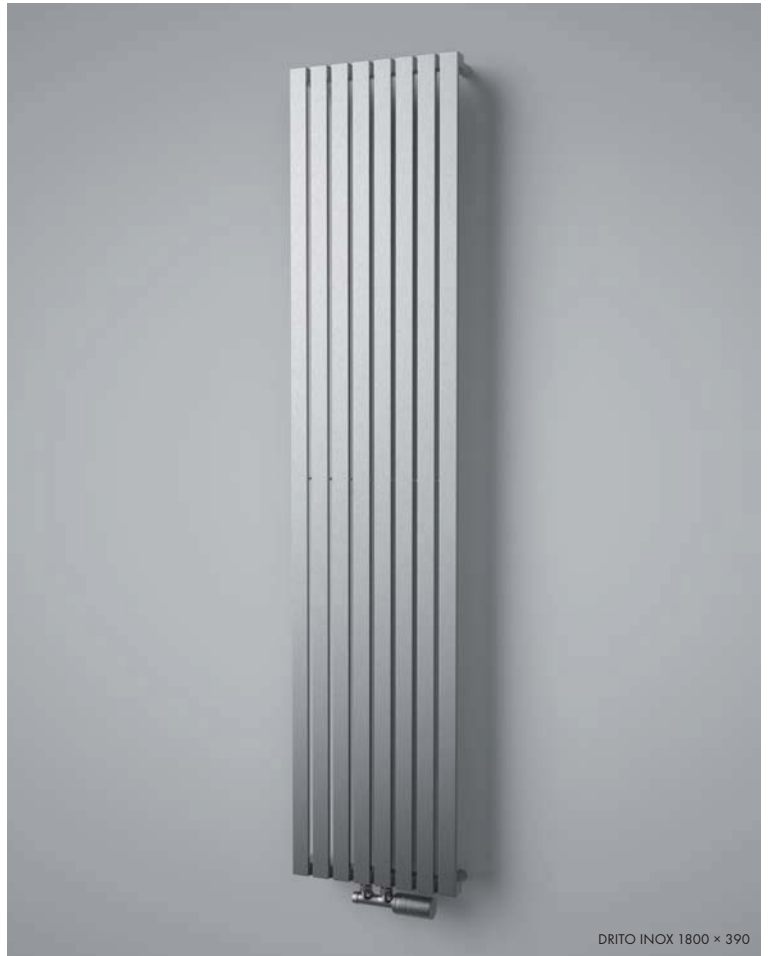


DRITO INOX 1800 × 390

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1800/390	58	18,0	4,9	1,28	683	555	355	-	mc 50



Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

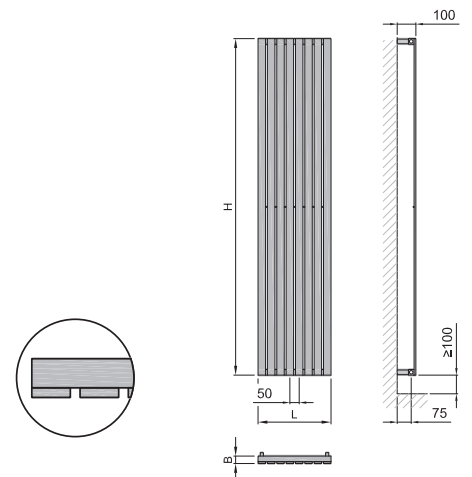

DXDO 1800 0390...

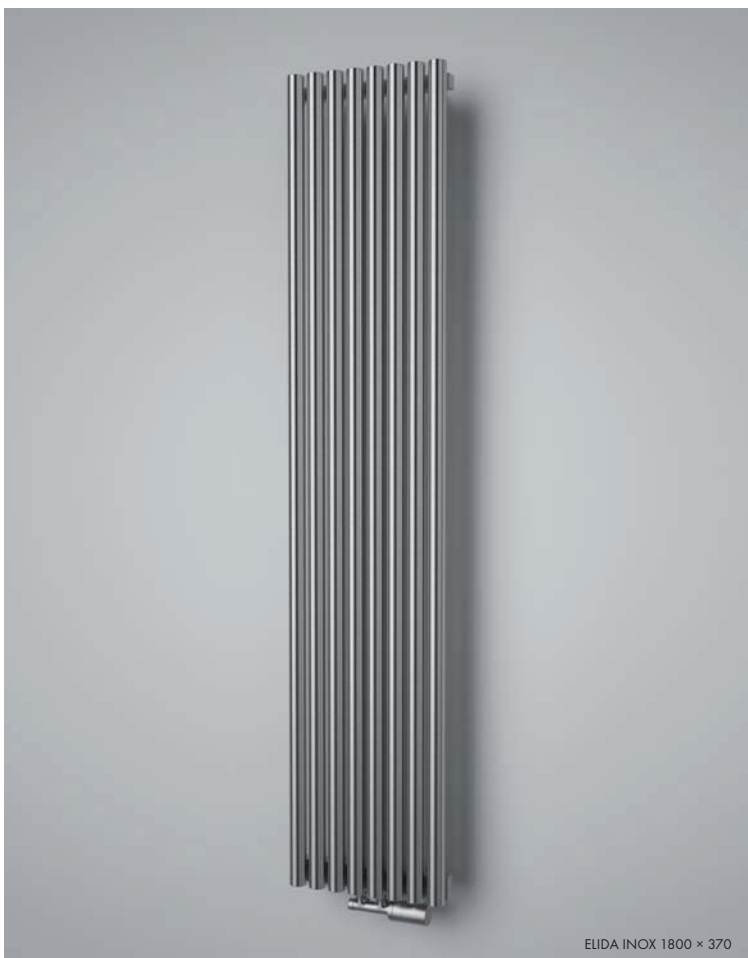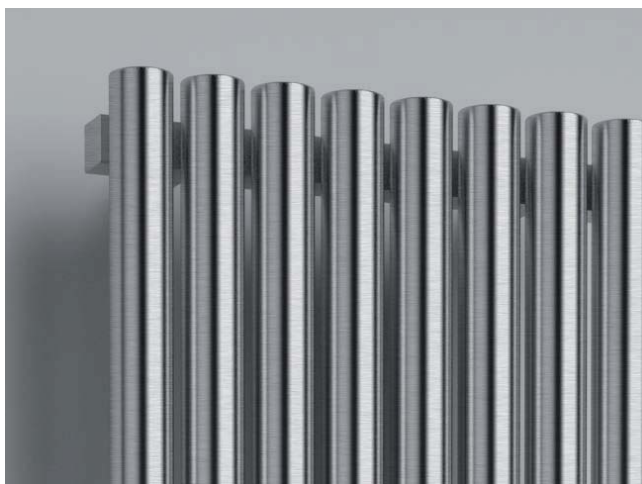

ELIDA INOX


Material	stainless steel pipes \varnothing 40 mm stainless steel profiles 30 x 30 mm
Connection thread	2 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	8
Surface treatment	brushed stainless steel




ELIDA INOX 1800 x 370

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1800/370	88	22,4	16,2	1,28	861	699	448	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

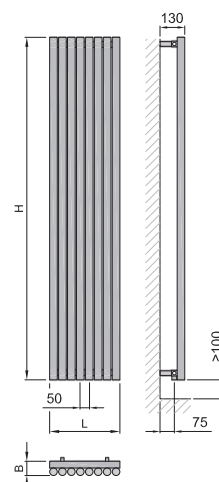

DXEL 1800 0370...



SQUARE INOX


Material	stainless steel profiles 30 × 30 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of profiles	12
Surface treatment	brushed stainless steel




SQUARE INOX 1840 × 500

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1840/500	48	11,2	5,6	1,30	429	348	221	-	470

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

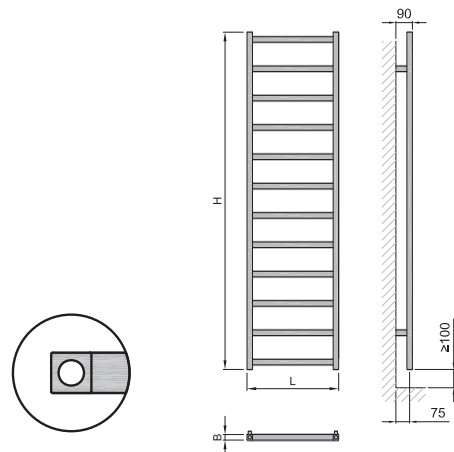

DXSQ 1840 0500...



PIANI INOX


Material	stainless steel profiles 30 × 30 mm stainless steel profiles 30 × 20 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of profiles	15
Surface treatment	brushed stainless steel




PIANI INOX 1000 × 500

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1000/500	50	12,7	4,9	1,30	464	376	239	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

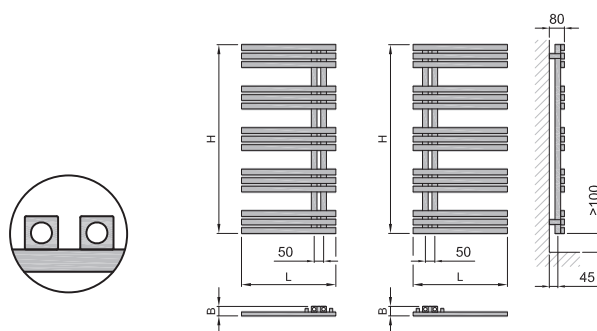

DXPI-L 1000 0500...

DXPI-R 1000 0500...



CALYPSO INOX


Material	stainless steel pipes \varnothing 50 mm stainless steel pipes \varnothing 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	22, 33
Surface treatment	brushed stainless steel



CALYPSO INOX 1180 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1180/500	50	11,4	7,8	1,30	391	316	201	400	450
1180/600	50	12,8	8,5	1,30	457	370	235	500	550
1765/500	50	17,1	11,8	1,29	587	476	304	600	450
1765/600	50	19,1	12,8	1,29	686	556	355	700	550

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

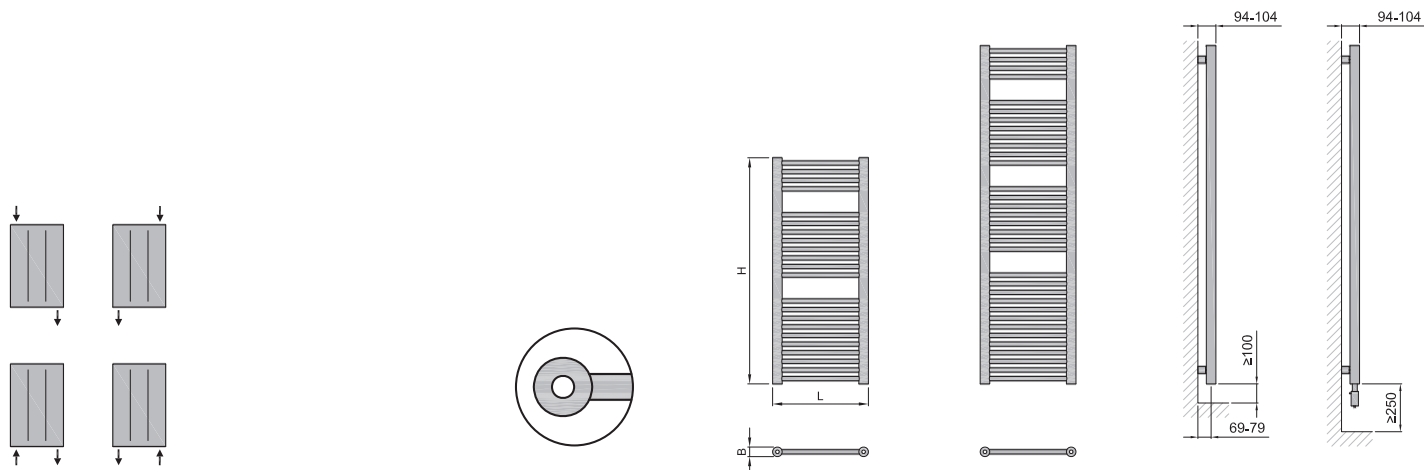

DXCA 1180 0500...
DXCA 1180 0600...
DXCA 1765 0500...
DXCA 1765 0600...

Connection options

CALYPSO RADIUS INOX

NEW



CALYPSO RADIUS INOX


Material	stainless steel pipes \varnothing 50 mm stainless steel pipes \varnothing 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	22, 33
Surface treatment	brushed stainless steel



CALYPSO RADIUS INOX 1180 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1180/500	77	11,6	7,9	1,30	391	317	201	400	450
1180/600	99	13,0	8,7	1,30	453	367	233	500	550
1765/500	77	17,4	11,9	1,28	588	477	305	600	450
1765/600	99	19,5	13,0	1,28	681	553	353	700	550

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

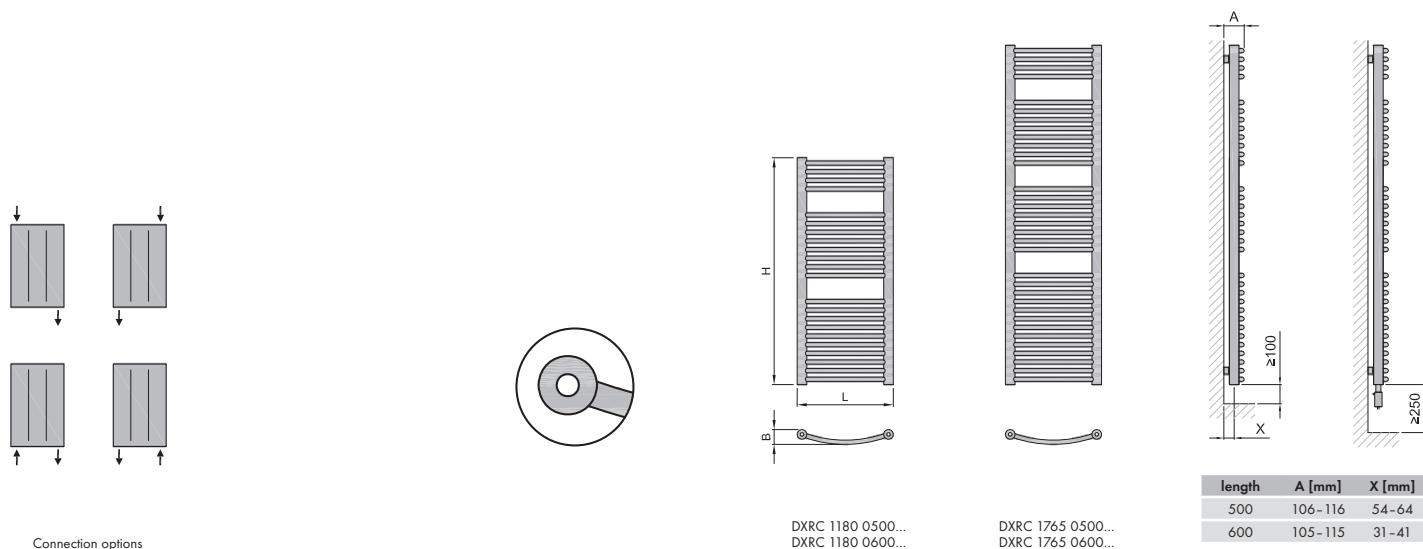



CALYPSO CHROME

Material	steel pipes \varnothing 22 mm steel profiles D35 × 41 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	24, 32, 37




CALYPSO CHROME 1135 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1135/600	30	11,5	6,7	1,26	499	407	262	500	559
1535/600	30	15,4	9,0	1,26	668	544	351	700	559
1735/600	30	17,6	10,3	1,26	767	625	403	800	559



Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)



direct middle connection standard

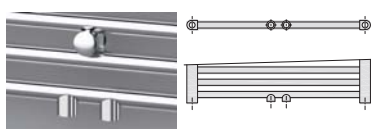

direct middle connection with cover

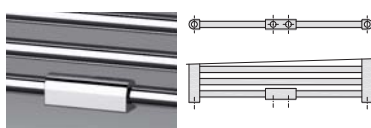

Connection options

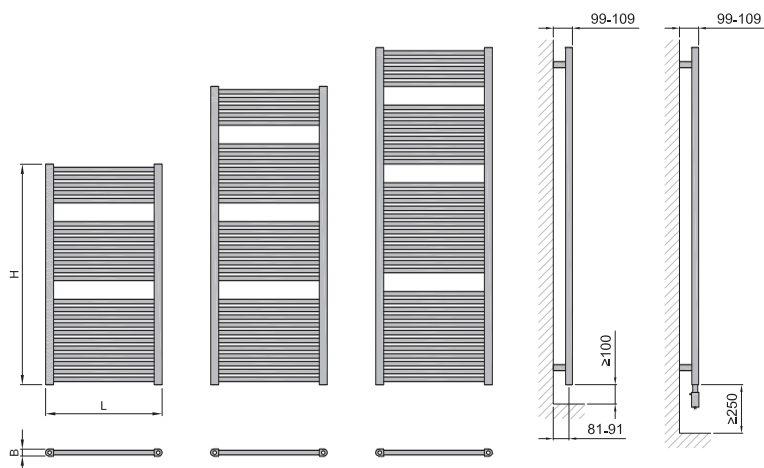

DCAC 1135 0600...

DCAC 1535 0600...

DCAC 1735 0600...

CALYPSO RADIUS CHROME

NEW



CALYPSO RADIUS CHROME

Material	steel pipes \varnothing 22 mm steel profiles D35 x 41 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	24, 32, 37




CALYPSO RADIUS CHROME 1135 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1135/600	108	11,8	6,8	1,22	504	413	270	500	559
1535/600	108	15,7	9,2	1,22	675	554	362	700	559
1735/600	108	18,0	10,5	1,22	775	636	416	800	559



Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)


radius middle connection standard

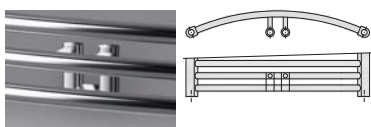

radius middle connection with cover

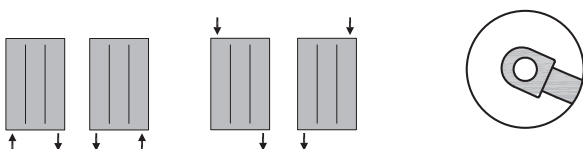

Connection options

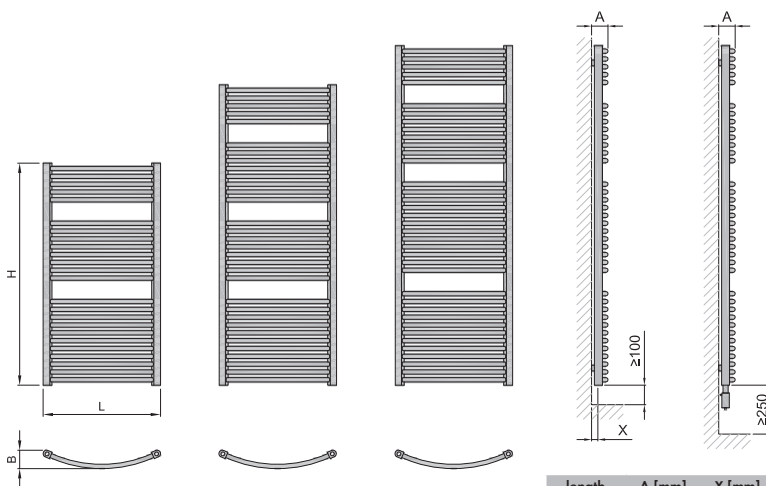

RCAL 1135 0600...

RCAL 1535 0600...

RCAL 1735 0600...

length	A [mm]	X [mm]
500	108-118	53-63
600	107-117	32-42



PASTELL YELLOW



COOL ICE



SCELTA GLASS PURE WHITE

SCELTA GLASS

Material	design hardened safety glass steel pipes \varnothing 28 mm / steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,50 MPa
Max. operating temperature	95 °C



Scelta Glass, PASTEL YELLOW, rounded polished glass, angular corners

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	
1810/620	86	45,0	7,2	1,31	989	800	506	mc 50


Scelta Glass, PURE WHITE, rounded polished glass, rounded corners

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	
1810/620	86	45,0	7,2	1,31	989	800	506	mc 50



Scelta Glass, COOL ICE, rounded matt glass, rounded corners

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	
1810/620	86	45,0	7,2	1,31	989	800	506	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.





Connection options

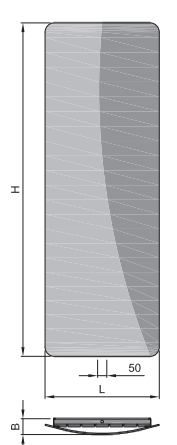



PURE WHITE
DDBG 1810 0620 SMA7


COOL ICE
DGBM 1810 0620 SMA8

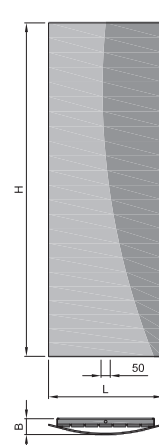

PASTELL YELLOW
DGAG 1810 0620 SMA2




RAIL - POSITION
OPTIONS (both variants)



SCELTA MIRROR

NEW

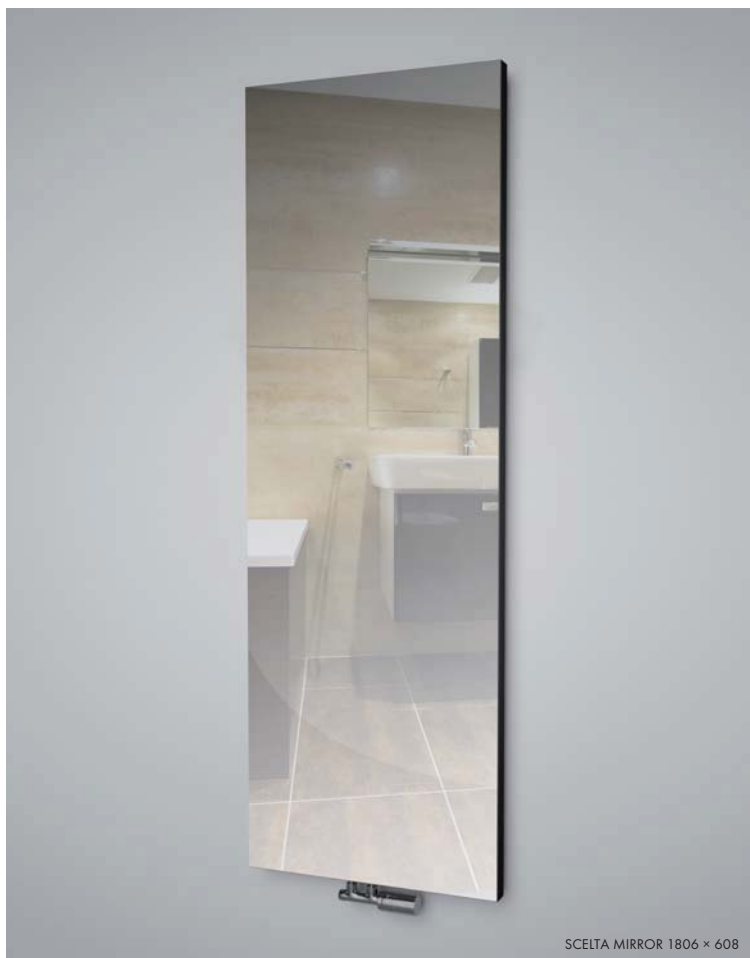

SCELTA MIRROR


Material	whole area mirror, thickness 4 mm steel pipes \varnothing 28 mm / steel profiles 70 x 11 mm
Connection thread	2 x G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	95 °C




SCELTA MIRROR 1806 x 608

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1806/456	45	42,5	6,1	1,28	564	458	293	-	mc 50
1806/608	45	55,9	8,2	1,28	749	608	390	-	mc 50

Back painted by the colour chart
Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

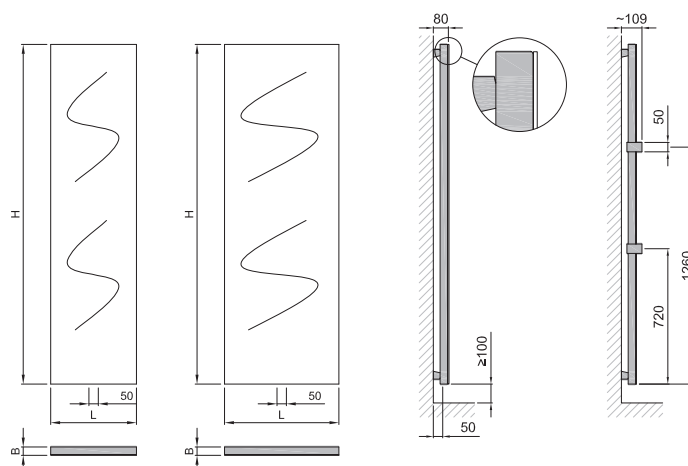

DSMR 1806 0456...

DSMR 1806 0608...

RAIL - POSITION OPTIONS



SCELTA PLAN

Material	steel pipes \varnothing 28 mm, steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	95 °C



SCELTA PLAN 1806 × 608


Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]	
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1206/456	40	27,7	5,6	1,279	549	446	287	mc 50	scelta plan
1806/608	40	44,5	8,2	1,279	1070	869	557	mc 50	scelta plan

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]	
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1206/456	40	25,1	5,6	1,279	384	312	201	mc 50	scelta stainless steel plan
1806/608	40	39,1	8,2	1,279	749	608	390	mc 50	scelta stainless steel plan

Thermal power measuring follows in accordance with EN 442.

Perforation, split covers and print pointing of radiator per order, see page 5.

Accessories (page 59, 60 and 61) is not part of the radiator.


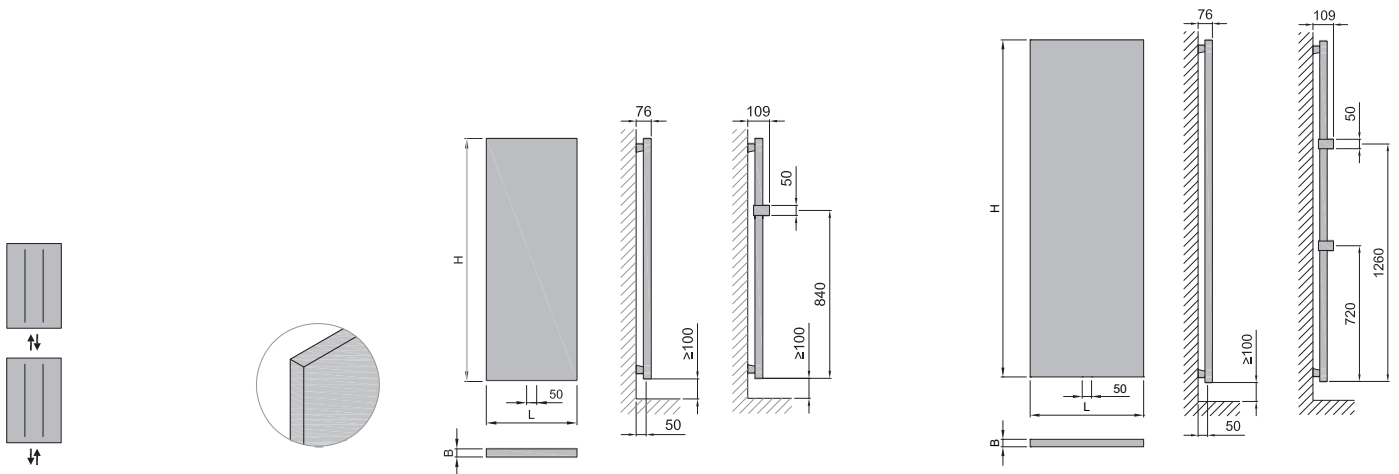


DSCP 1206 0456...

Rail - position option

DSCP 1806 0608..

Rail - position option

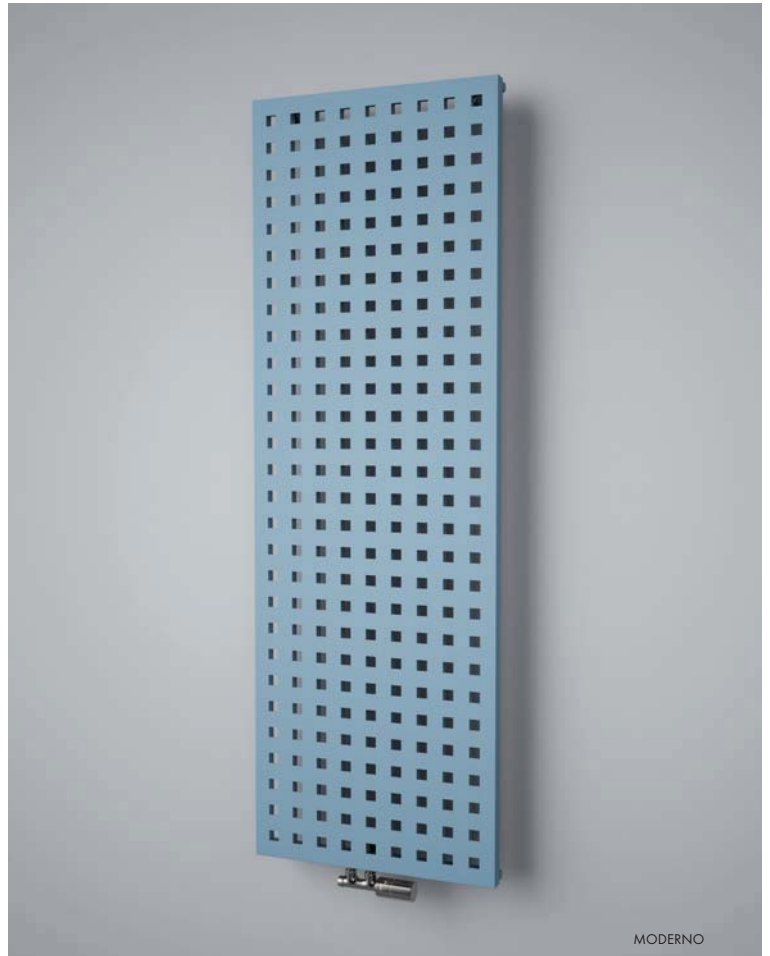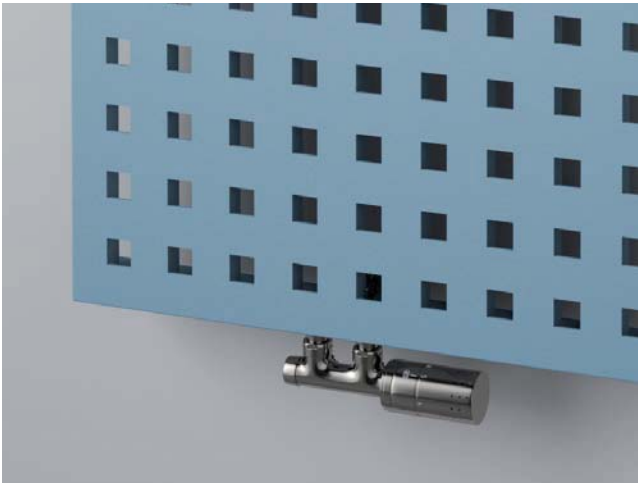


MODERNO

Material	steel pipes \varnothing 28 mm / steel profiles 30 × 30 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C



Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1206/288	59	14,1	4,6	1,273	377	307	197	-	-	mc 50
1206/477	59	21,9	7,4	1,273	607	494	317	-	-	mc 50
1206/603	59	27,8	9,2	1,273	757	616	395	-	-	mc 50
1806/288	59	20,5	6,7	1,273	540	439	282	-	-	mc 50
1806/477	59	32,0	10,9	1,273	890	724	465	-	-	mc 50
1806/603	59	39,5	13,6	1,273	1128	917	589	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Stainless steel cover is available per order.
Accessories (page 59, 60 and 61) is not part of the radiator.

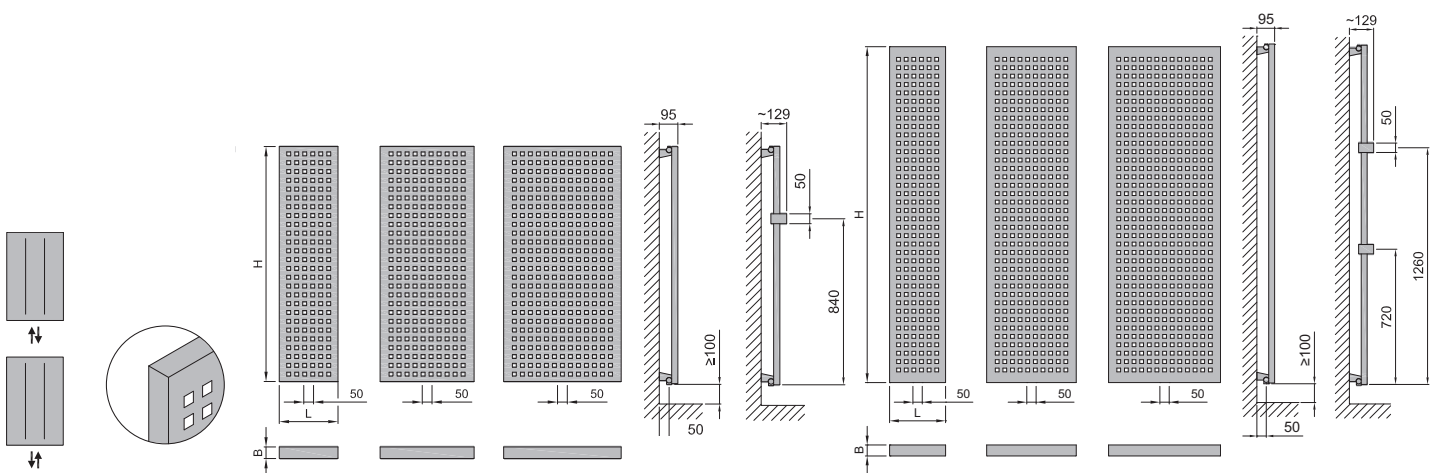

Connection options

DMDR 1206 0288DMDR 1206 0477... DMDR 1206 0603... RAIL - POSITION OPTIONS

DMDR 1806 0288DMDR 1806 0477... DMDR 1806 0603... RAIL - POSITION OPTIONS

SIMETRIA | SIMETRIA DOUBLE



SIMETRIA

Material	steel pipes \varnothing 28 mm / steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	4, 6, 8

SIMETRIA DOUBLE

Material	steel pipes \varnothing 28 mm / steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	8, 12, 16



SIMETRIA DOUBLE 1800 × 602

SIMETRIA

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1800/298	39	14,0	4,1	1,272	614	499	321	-	-	mc 50
1800/450	39	21,0	6,1	1,272	910	740	475	-	-	mc 50
1800/602	39	27,5	7,9	1,272	1205	943	602	-	-	mc 50


SIMETRIA DOUBLE

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1800/298	48	28,3	7,9	1,304	817	661	420	-	-	mc 50
1800/450	48	42,3	11,9	1,304	1162	940	597	-	-	mc 50
1800/602	48	56,4	15,9	1,288	1549	980	629	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.

Collom Double Mirror is available per order.

Accessories (page 59, 60 and 61) is not part of the radiator.

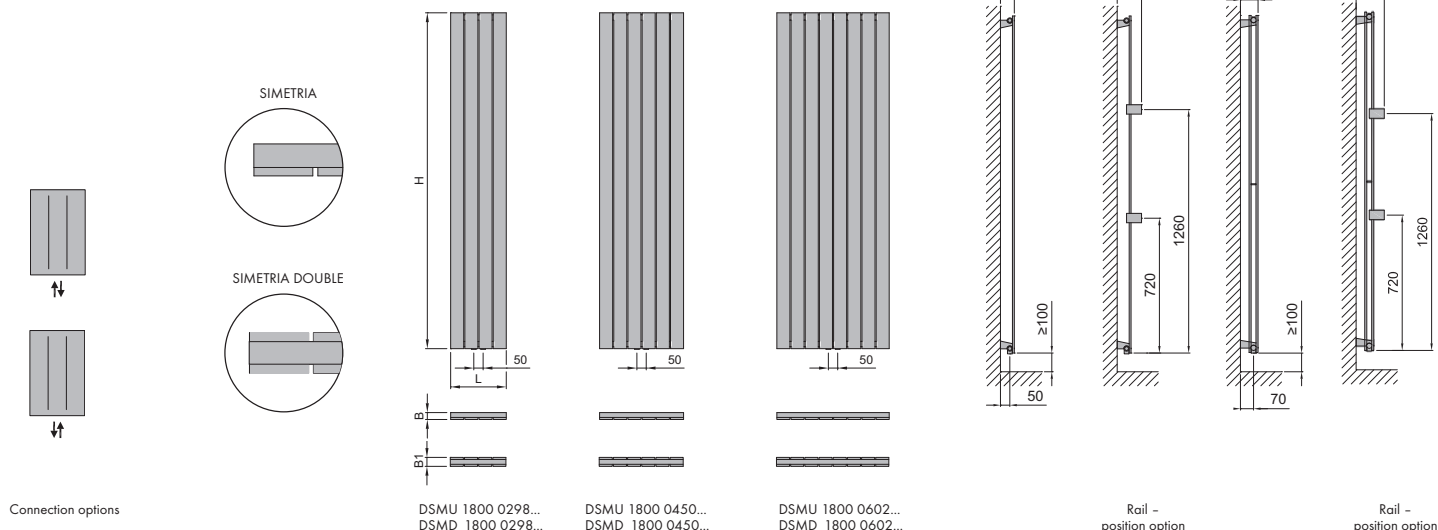

SIMETRIA MIRRORI | SIMETRIA LIGHT



SIMETRIA MIRROR

Material	steel pipes \varnothing 28 mm / steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	95 °C
Number of profiles	5

SIMETRIA LIGHT

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	5, 8, 11



SIMETRIA MIRROR 1800 × 602

SIMETRIA MIRROR


Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/602	38	24,9	5,4	1,272	773	479	308	-	-	mc 50

SIMETRIA LIGHT

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/274	38	12,5	3,1	1,281	550	447	286	-	-	mc 50
1800/442	38	19,5	5,1	1,281	866	703	450	-	-	mc 50
1800/610	38	26,5	7,0	1,281	1183	961	615	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.

Accessories (page 59, 60 and 61) is not part of the radiator.

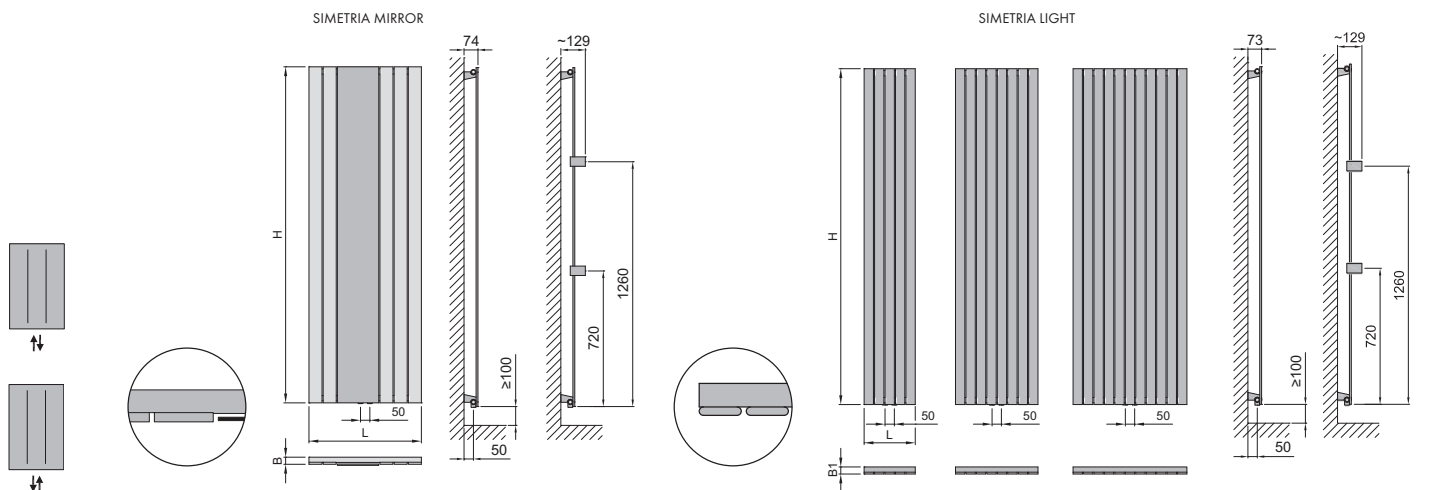

DSML 1800 0274... DSML 1800 0442... DSML 1800 0610...

Connection options

DSMM 1800 0602...

Rail - position option

Rail - position option

CUBO | CUBO DOUBLE



CUBO

Material	steel pipes \varnothing 28 mm / steel profiles 30 × 30 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of profiles	7, 10, 13

CUBO DOUBLE

Material	steel pipes \varnothing 28 mm / steel profiles 30 × 30 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of profiles	14, 20, 26



CUBO 1800 × 606


CUBO

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1800/318	58	18,5	9,4	1,276	766	623	399	-	-	mc 50
1800/462	58	26,0	13,5	1,283	1094	888	568	-	-	mc 50
1800/606	58	34,0	17,5	1,262	1422	1158	746	-	-	mc 50

CUBO DOUBLE

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1800/318	86	36,0	18,6	1,250	1096	895	579	-	-	mc 50
1800/462	86	51,3	26,5	1,250	1564	1276	826	-	-	mc 50
1800/606	86	66,7	34,6	1,250	2030	1657	1072	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

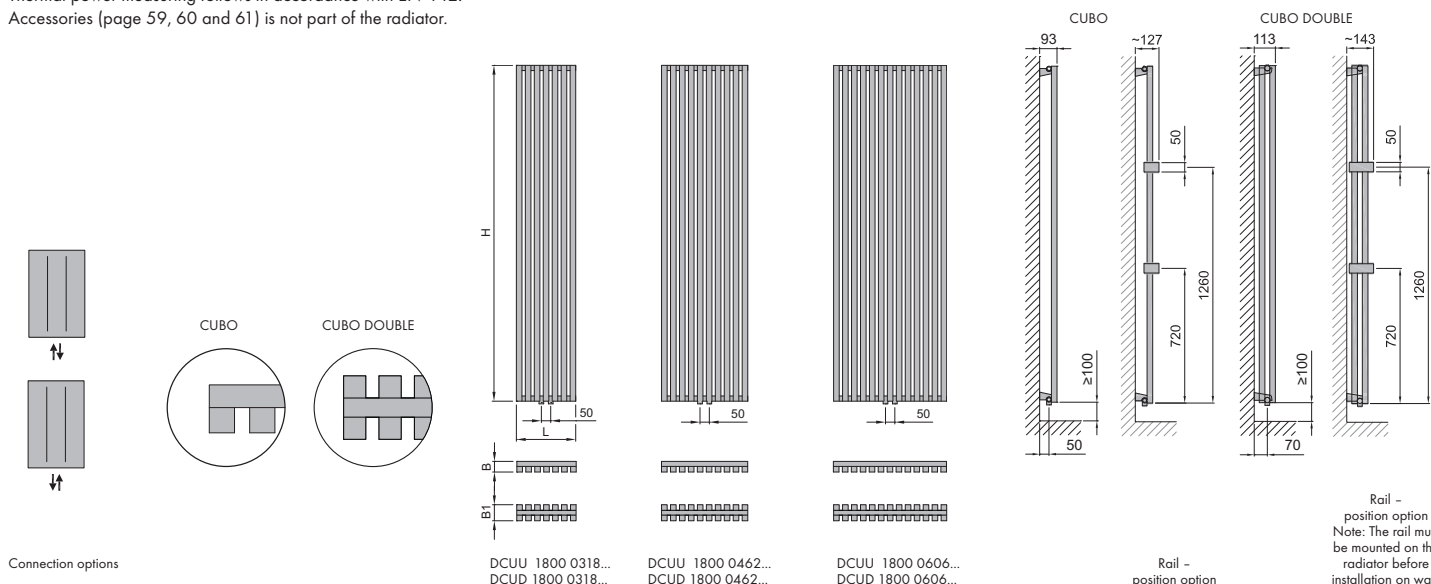



ARIBO

Material	steel pipes Ø 28 mm / steel pipes Ø 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	8, 13 17

ARIBO DOUBLE

Material	steel pipes Ø 28 mm / steel pipes Ø 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	16, 26, 34



ARIBO DOUBLE 1800 × 600


ARIBO

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/300	49	10,0	5,1	1,291	530	430	274	-	-	mc 50
1800/480	49	16,5	8,3	1,291	855	693	442	-	-	mc 50
1800/600	49	21,0	10,9	1,291	1064	862	550	-	-	mc 50



ARIBO DOUBLE

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/300	70	19,5	10,0	1,307	834	674	433	-	-	mc 50
1800/480	70	31,5	16,3	1,307	1334	1079	693	-	-	mc 50
1800/600	70	40,5	21,2	1,307	1667	1348	866	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

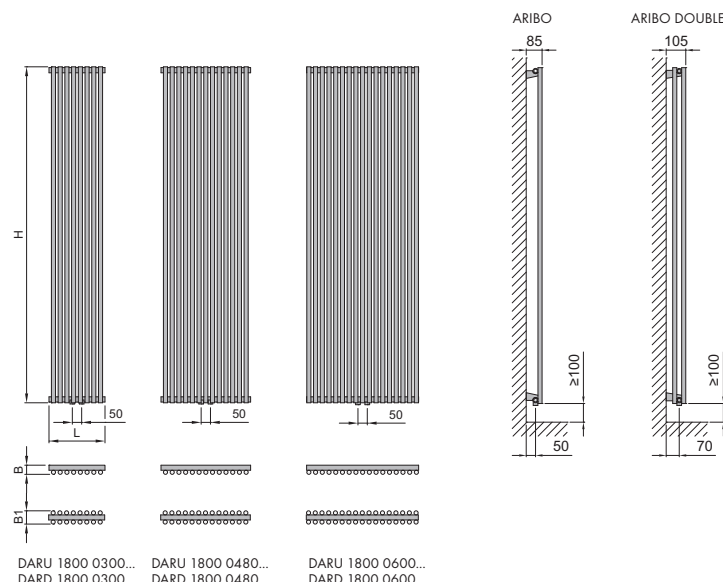



DOMINO




Material	steel pipes $\varnothing 28$ mm / steel profiles 70 x 11 mm
Connection thread	4 x G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	8, 13, 17



DOMINO 1800 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C			
1800/300	98	27,5	7,9	1,297	1100	891	567	-	-	mc 50
1800/480	98	44,5	12,9	1,297	1761	1427	908	-	-	mc 50
1800/600	98	58,0	16,9	1,297	2203	1784	1136	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

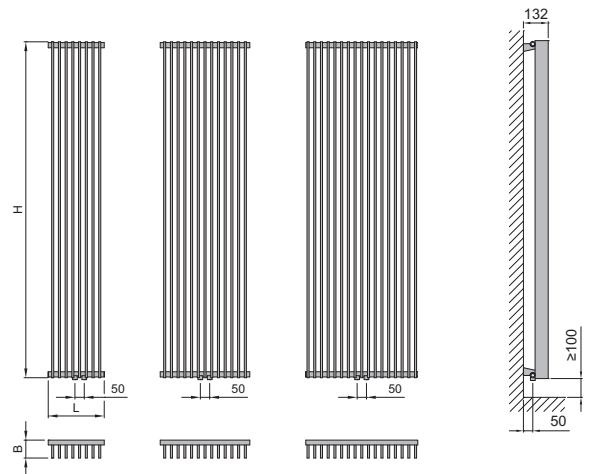

Connection options

DDOM 1800 0300... DDOM 1800 0480... DDOM 1800 0600...

DOMINO LIGHT DOMINO DOUBLE



DOMINO LIGHT

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	8, 13, 17

DOMINO DOUBLE

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	16, 26, 34



DOMINO DOUBLE 1800 × 600

DOMINO LIGHT


Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C	paint [W]	chrome [W]	
1800/300	79	19,5	4,9	1,292	821	666	424	-	-	mc 50
1800/480	79	31,0	8,1	1,292	1314	1065	679	-	-	mc 50
1800/600	79	40,5	10,5	1,292	1643	1332	849	-	-	mc 50

DOMINO DOUBLE

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C	paint [W]	chrome [W]	
1800/300	128	37,5	9,7	1,262	1127	918	592	-	-	mc 50
1800/480	128	60,5	15,8	1,262	1793	1461	941	-	-	mc 50
1800/600	128	79,0	20,7	1,262	2325	1894	1221	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.

Accessories (page 59, 60 and 61) is not part of the radiator.

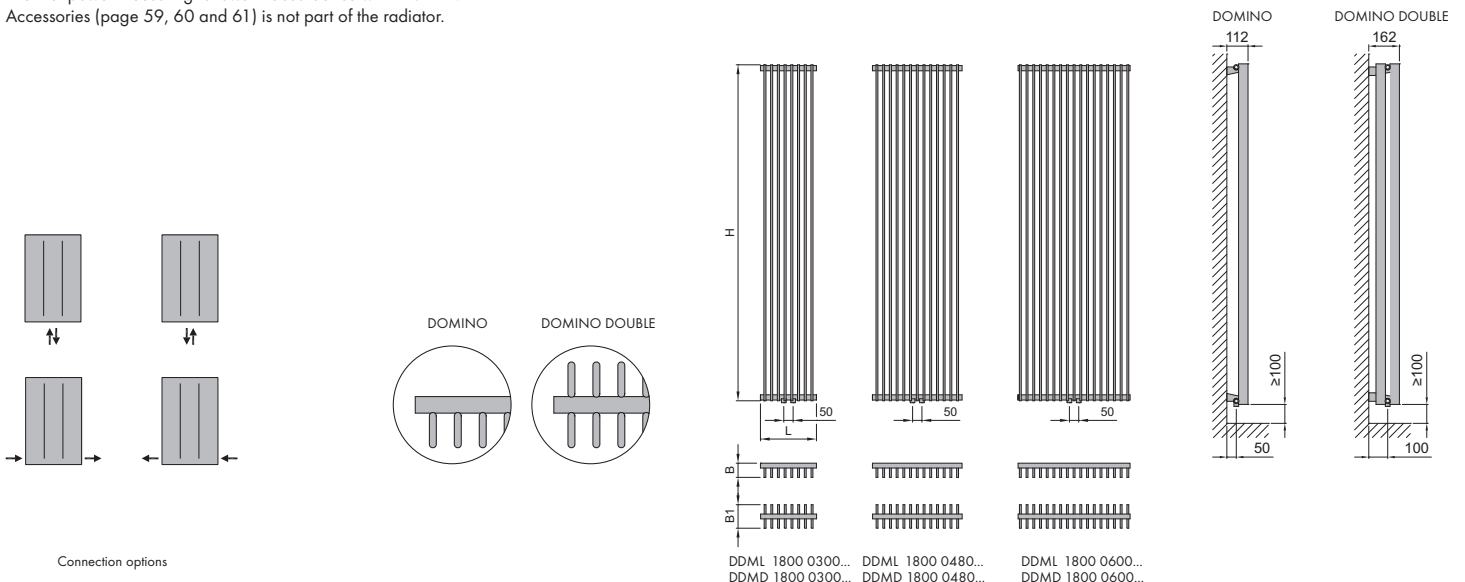



PULITO




Material	steel pipes \varnothing 26 mm / steel profiles D35 x 41 mm
Connection thread	2 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	12, 15, 18



PULITO 1800 x 670

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/535	35	17,2	10,2	1,276	1022	831	533	-	-	mc 50
1800/670	35	21,5	12,7	1,276	1280	1040	667	-	-	mc 50
1800/805	35	25,8	15,3	1,276	1538	1250	802	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.

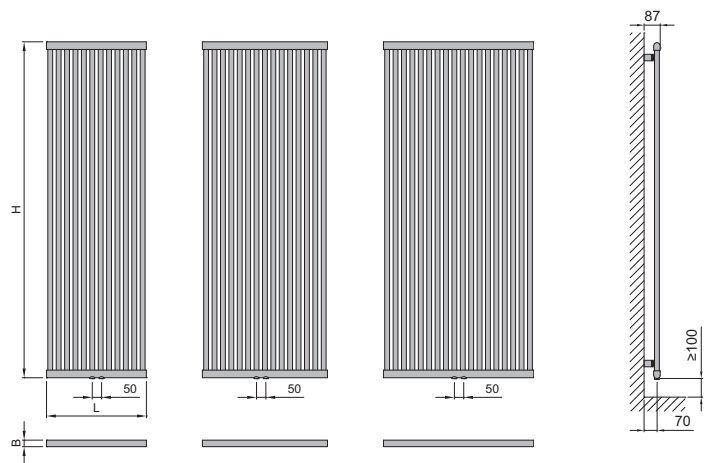

Connection options

DPUL 1800 0535...

DPUL 1800 0670...

DPUL 1800 0805...



U10V

Material	steel plates 70 × 11 mm
Connection thread	4 × G1/2"
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	4, 6, 8

U10L

Material	steel plates 70 × 11 mm
Connection thread	4 × G1/2"
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	8, 10



U10L 1800 × 560

U10V

Typ H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	
1800/280	50	17,6	4,1	1,259	609	496	326	230
1800/420	50	26,6	6,2	1,259	866	706	463	370
1800/560	50	35,4	8,3	1,259	1111	905	594	510


U10L

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Mirror Dimension		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	H [mm]	L [mm]	
1800/560	59	35,4	8,3	1,259	1111	905	594	1500	350	510
1800/700	59	44,4	10,4	1,259	1348	1099	721	1500	490	650

Thermal power measuring follows in accordance with EN 442.

Middle connection is available per order.

Accessories (page 59, 60 and 61) is not part of the radiator.

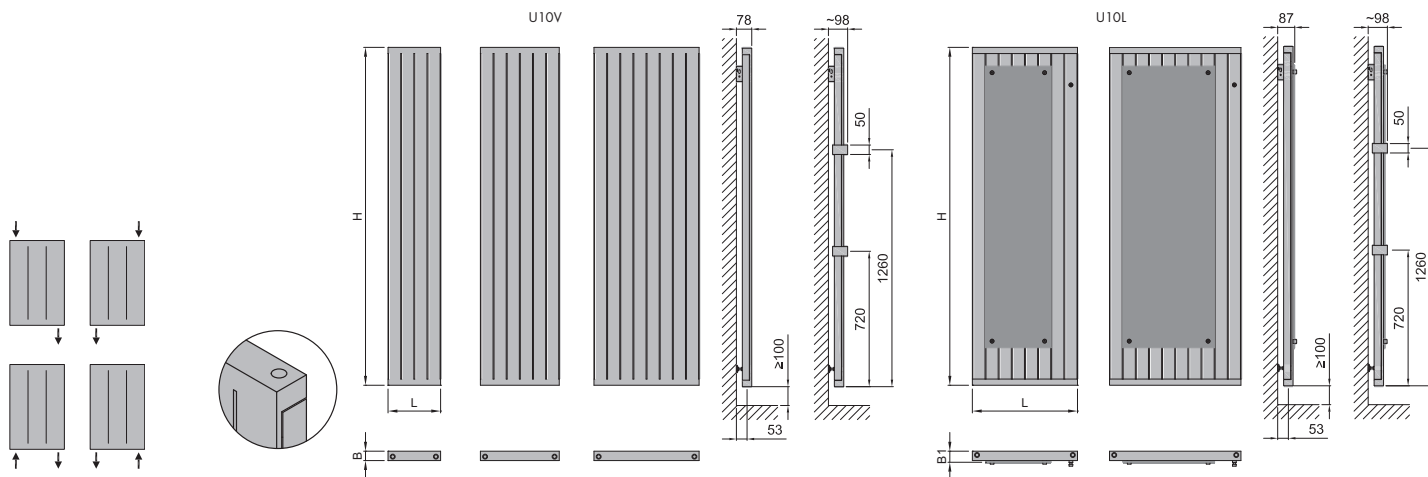

Connection options

U10V 1800 0280...

U10V 1800 0420...

U10V 1800 0560...

Rail - position option

U10L 1800 0560...

U10L 1800 0700...

Rail - position option

SIMETRIA DOUBLE HORIZONTAL



SIMETRIA DOUBLE HORIZONTAL


Material	steel pipes \varnothing 28 mm / steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	16



SIMETRIA DOUBLE HORIZONTAL 602 × 1400

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C			
602/1000	48	32,1	9,1	1,278	921	748	479	-	-	952
602/1400	48	44,3	12,5	1,278	1271	1033	662	-	-	1352
602/1800	48	56,4	15,9	1,278	1621	1317	844	-	-	1752

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

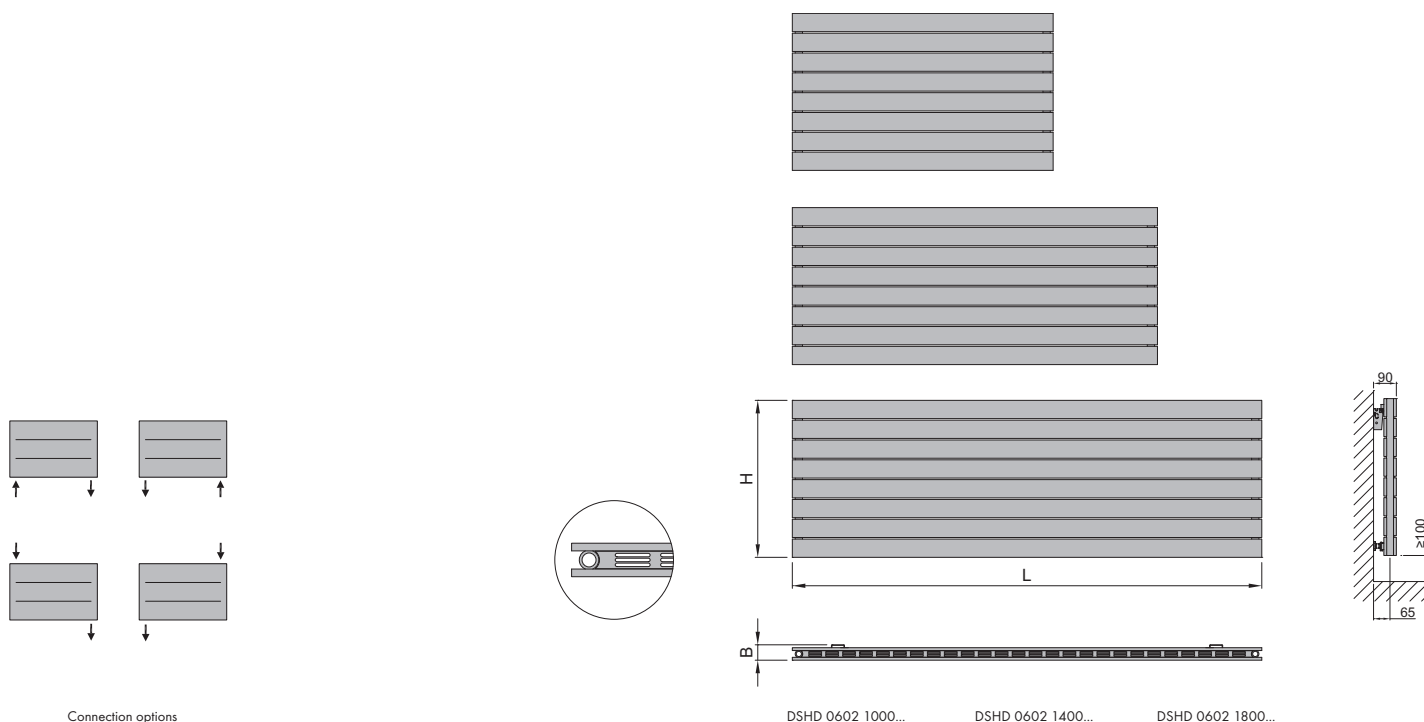

U10 H | U20 H



U10 H / U20 H

Material	steel plates 70 × 11 mm
Connection thread	4 × G1/2"
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	8 for U10H 16 for U20H



U10H

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]	
					75/65/20 °C	70/55/20 °C	55/45/20 °C	AB, CD, AD, CB	EF, FE
560/1000	50	20,5	5,1	1,224	617	506	330	510	966
560/1400	50	28,0	6,7	1,224	864	708	462	510	1366
560/1800	50	35,4	8,3	1,224	1111	911	594	510	1766




U20H

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Connection span [mm]	
					75/65/20 °C	70/55/20 °C	55/45/20 °C	AB, CD, AD, CB, AC, CA	EF, FE
560/1000	72	39,1	9,3	1,284	964	782	500	510	966
560/1400	72	53,9	12,5	1,284	1344	1091	697	510	1366
560/1800	72	68,7	15,6	1,284	1723	1398	894	510	1766

Thermal power measuring follows in accordance with EN 442. U10H is not available with AC, CA connection.


Wide range of radiators U10H, U20H you can find in catalogue EXACT.

(valve connection, middle connection etc.)

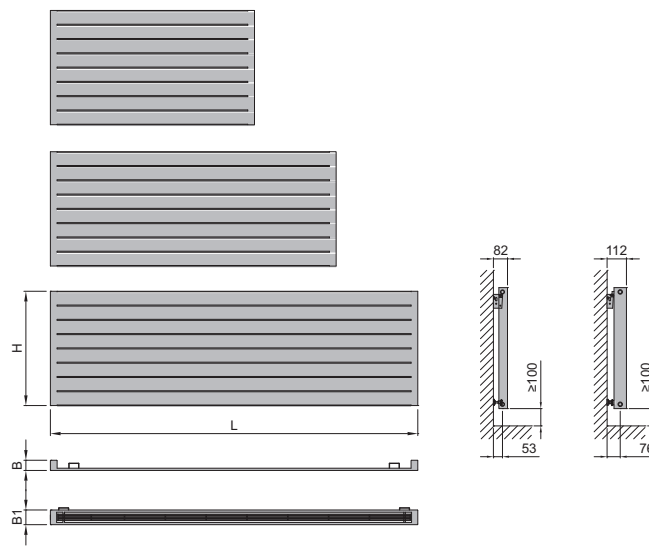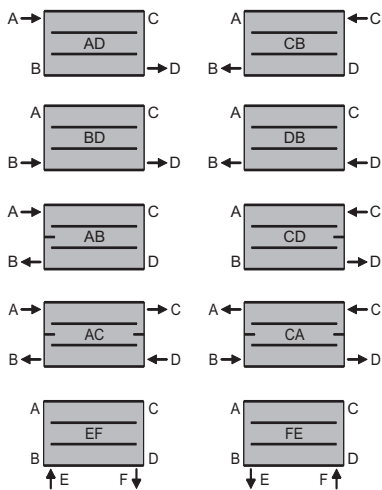

U10H 0560 1000... U10H 0560 1400... U10H 0560 1800...
 U20H 0560 1000... U20H 0560 1400... U20H 0560 1400...

ARIBO DOUBLE HORIZONTAL

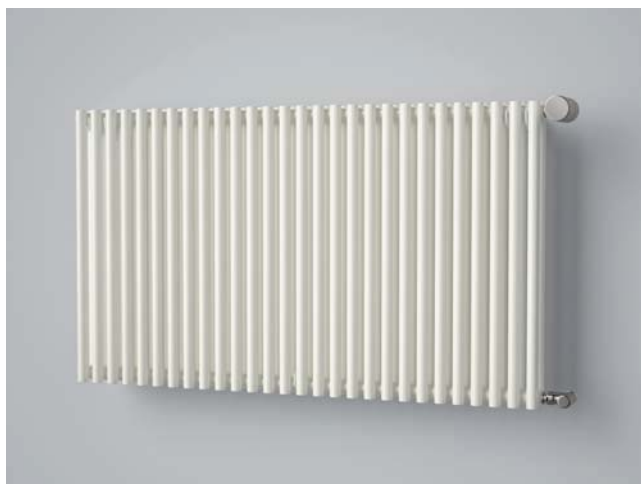

ARIBO DOUBLE HORIZONTAL




Material	steel pipes \varnothing 28 mm / steel pipes \varnothing 22 mm
Connection thread	4 \times G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	56, 78, 100



ARIBO DOUBLE HORIZONTAL 576 \times 1000

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C	paint [W]	chrome [W]	
576/1000	70	22,5	11,8	1,282	1135	922	582	-	-	540
576/1400	70	31,5	16,4	1,282	1581	1284	811	-	-	540
576/1800	70	40,5	21,0	1,282	2026	1645	1040	-	-	540

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

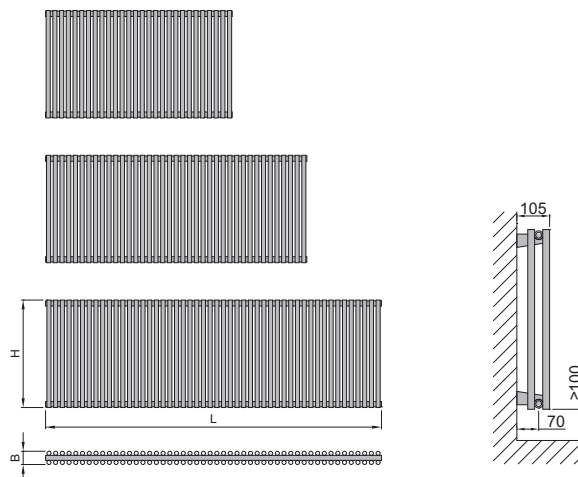


Connection options

DARI 0576 1000...

DARI 0576 1400...

DARI 0576 1800...

DOMINO DOUBLE HORIZONTAL

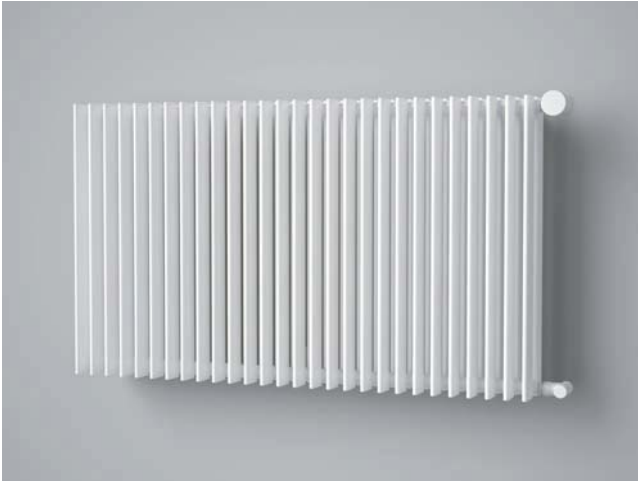

DOMINO DOUBLE HORIZONTAL







Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	56, 78, 100



DOMINO DOUBLE HORIZONTAL 576 × 1000

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
576/1000	128	43,0	11,5	1,262	1523	1241	799	-	-	540
576/1400	128	60,0	16,1	1,262	2111	1720	1108	-	-	540
576/1800	128	77,0	20,6	1,262	2700	2199	1417	-	-	540

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

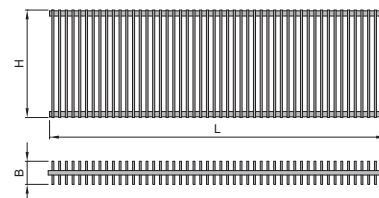

Connection options

DDDH 0576 1000... DDDH 0576 1400... DDDH 0576 1800...



QUADRATO


Material	steel profiles 40 × 40 mm
	steel profiles horizontal 25 × 25 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	21, 29





QUADRATO 1255 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1255/500	40	15,0	7,7	1,271	578	470	302	600	400	460
1255/600	40	17,3	8,7	1,271	675	549	353	700	500	560
1755/500	40	20,5	10,7	1,254	807	658	425	800	600	460
1755/600	40	23,7	12,1	1,254	941	768	496	900	700	560

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

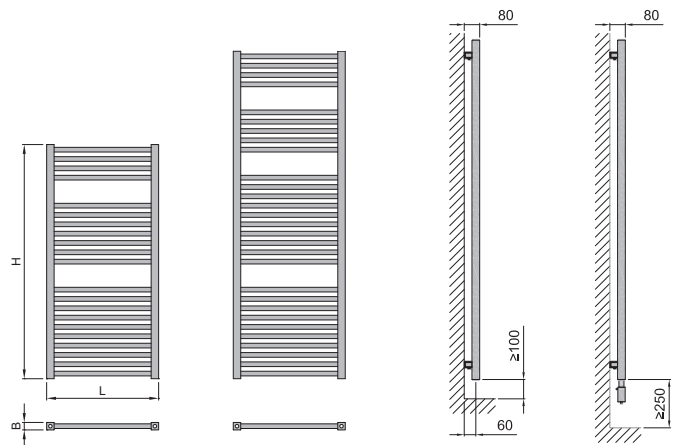

DQUA 1255 0500...
DQUA 1255 0600...

DQUA 1755 0500...
DQUA 1755 0600...



FIorenZO


Material	steel profiles 30 × 30 mm / steel profiles 30 × 30 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of profiles	21, 31




FIorenZO 1182 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1182/600	59	22,2	10,7	1,215	748	614	402	700	-	562
1758/600	59	32,2	15,9	1,221	1110	910	595	1100	-	562

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

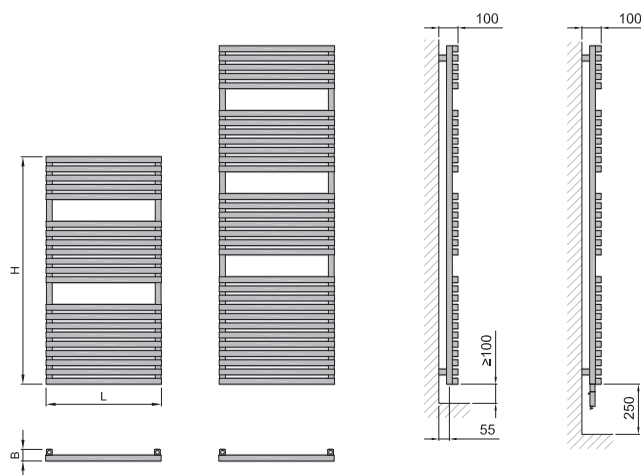

DFRO 1182 0600...

DFRO 1758 0600...



IKARO


Material	steel pipes \varnothing 28 mm / steel pipes \varnothing 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	14, 24, 36



IKARO 1212 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
732/500	48	6,1	2,7	1,187	337	278	184	300	200	464
732/600	48	7,0	3,2	1,187	389	321	212	400	300	564
1212/500	48	10,3	4,7	1,187	573	472	312	600	400	464
1212/600	48	11,8	5,4	1,187	663	547	362	700	500	564
1772/500	48	15,4	7,0	1,187	855	705	466	800	600	464
1772/600	48	17,7	8,1	1,187	989	815	539	1000	700	564

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.

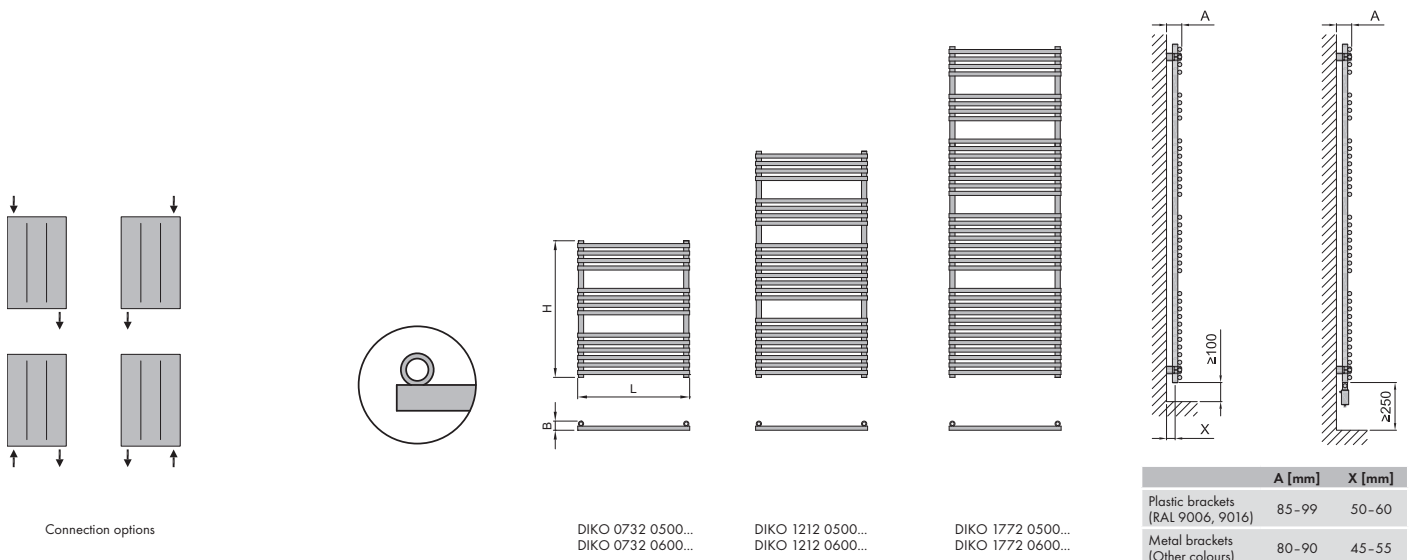

IKARO RADIUS



IKARO RADIUS

Material	steel pipes \varnothing 28 mm / steel pipes \varnothing 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	14, 24, 36




IKARO RADIUS 1212 × 600





Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
732/500	89	6,1	2,8	1,235	349	286	186	300	200	446
732/600	102	7,0	3,2	1,235	400	327	213	400	300	546
1212/500	89	10,4	4,7	1,235	593	485	316	600	400	446
1212/600	102	12,0	5,5	1,235	682	558	363	700	500	546
1772/500	89	15,5	7,1	1,235	878	718	467	900	600	446
1772/600	102	17,9	8,2	1,235	1018	833	542	1000	700	546

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

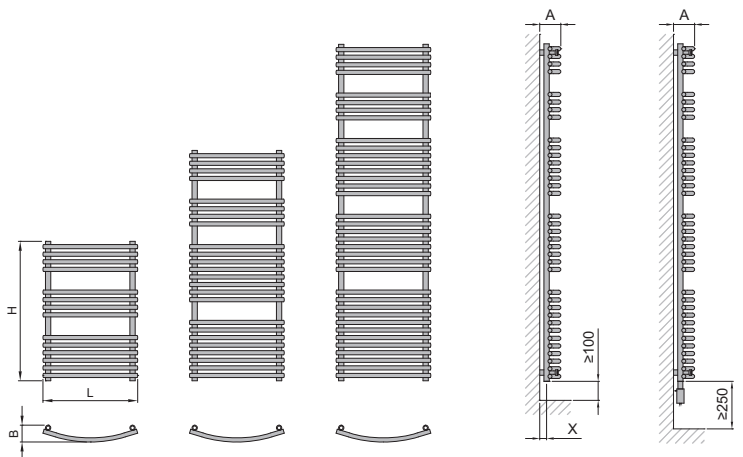

DIKR 0732 0500...
DIKR 0732 0600...

DIKR 1212 0500...
DIKR 1212 0600...

DIKR 1772 0500...
DIKR 1772 0600...

length [mm]	A [mm]	X [mm]
500	111 - 121	36 - 46
600	122 - 132	26 - 36

IKARO DOUBLE



IKARO DOUBLE


Material	steel pipes \varnothing 28 mm / steel pipes \varnothing 22 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	28, 48, 72




IKARO DOUBLE 1212 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
732/600	68	12,4	5,7	1,141	591	461	330	600	-	564
1212/600	68	21,2	9,7	1,141	955	793	533	900	-	564
1772/600	68	31,8	14,6	1,141	1429	1187	798	1200	-	564

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.




Connection options




DIKD 0732 0600...




DIKD 1212 0600...



DIKD 1772 0600...

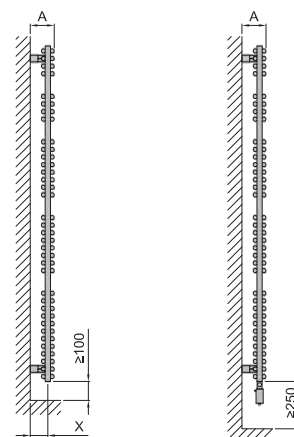

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	133-143	98-108
Metal brackets (Other colours)	128-138	93-103

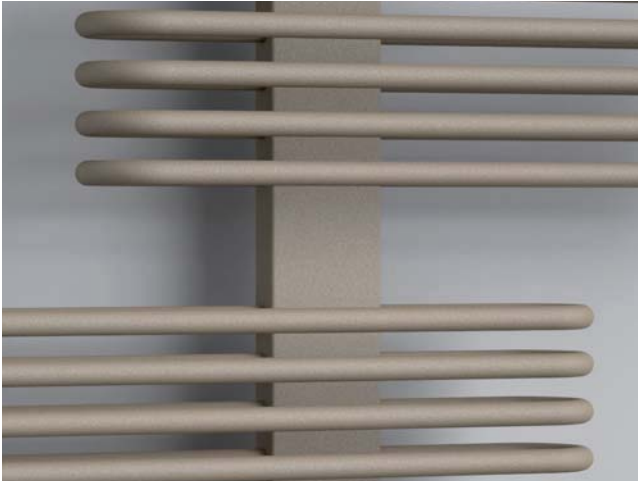

TORO, TORO PLUS, TORO EXTRA

Material	steel pipes \varnothing 18 mm / steel profiles 30 x 30 mm
Connection thread	2 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes Koro	25
Number of pipes Koro Extra	25
Number of pipes Koro Plus	25



TORO EXTRA 1180 x 800

TORO

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1180/600	107	21,6	6,9	1,289	1091	885	562	800	-	50


TORO EXTRA

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1180/800	107	21,6	6,9	1,269	1155	940	595	900	-	50

TORO PLUS

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1180/600	107	21,6	6,9	1,289	1091	885	562	800	-	50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

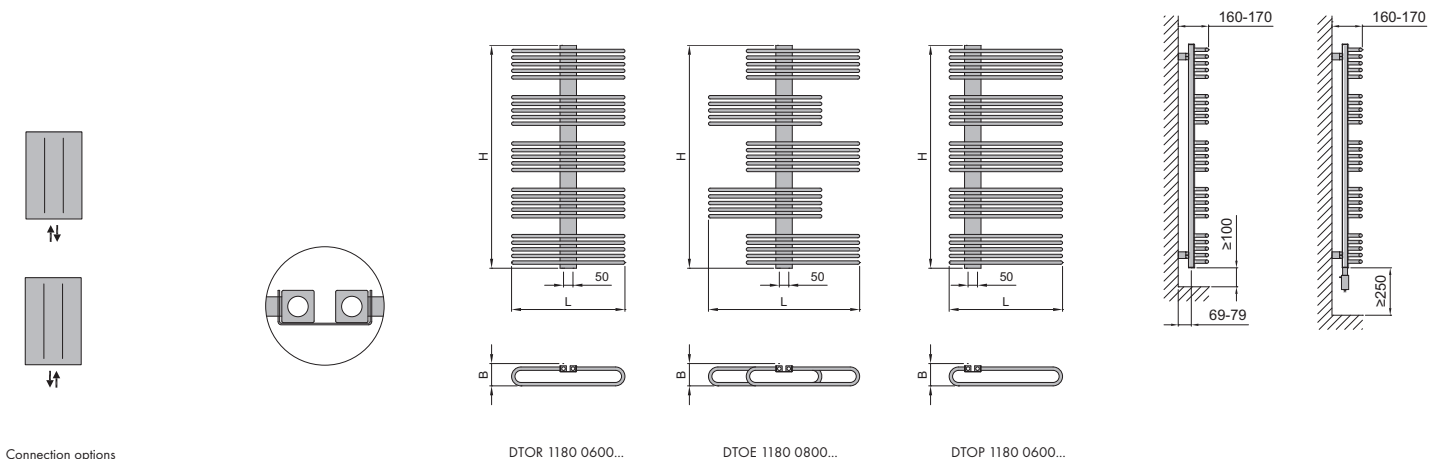

Connection options

DTOR 1180 0600...

DTOE 1180 0800...

DTOP 1180 0600...

PANEL LIGHT



PANEL LIGHT


Material	steel profiles D35 × 41 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	10, 16, 24



PANEL LIGHT 1180 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
725/500	35	7,6	3,0	1,273	358	291	187	400	-	459
725/600	35	8,8	3,3	1,273	421	342	220	400	-	559
1180/500	35	12,1	4,8	1,270	558	454	292	600	-	459
1180/600	35	14,2	5,3	1,270	658	535	344	700	-	559
1765/500	35	18,2	7,2	1,267	821	668	430	800	-	459
1765/600	35	21,2	8,0	1,267	966	786	506	1000	-	559

Thermal power measuring follows in accordance with EN 442.
Accessories (page 59, 60 and 61) is not part of the radiator.

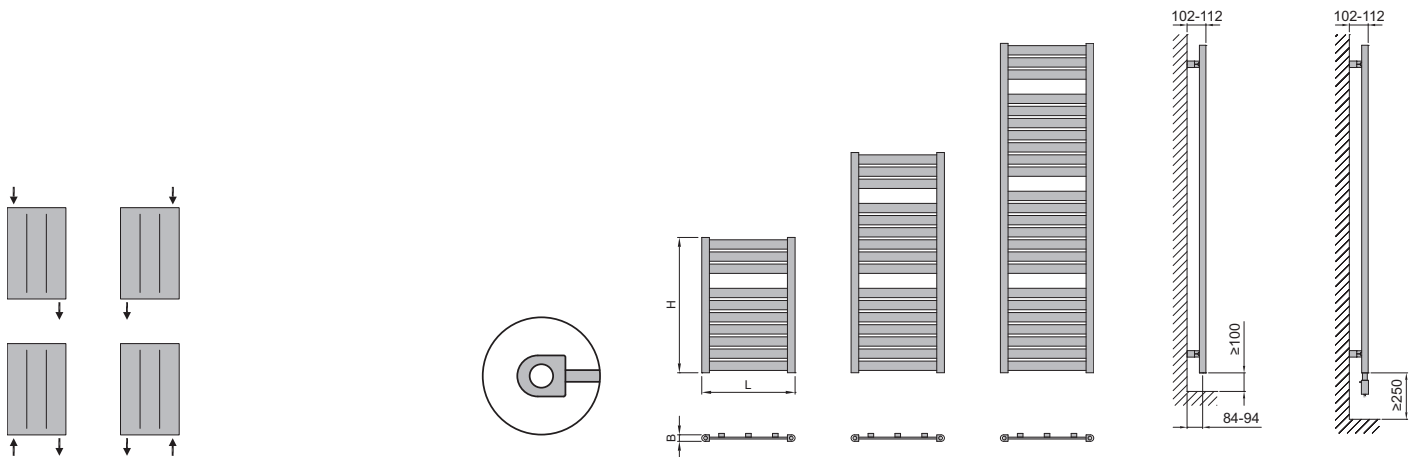

Connection options

DPAN 0725 0500...
DPAN 0725 0600...

DPAN 1180 0500...
DPAN 1180 0600...

DPAN 1765 0500...
DPAN 1765 0600...

PANEL PLUS | PANEL PLUS DOUBLE



PANEL PLUS

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,5 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	11, 17, 25

PANEL PLUS DOUBLE

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	22, 34, 50



PANEL PLUS 1180 × 606

PANEL PLUS


Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
732/506	35	9,0	2,4	1,227	355	291	190	-	-	456
732/606	35	10,0	2,8	1,227	416	341	223	-	-	556
1180/506	35	13,5	3,9	1,240	545	446	289	-	-	456
1180/606	35	16,0	4,5	1,240	638	522	339	-	-	556
1740/506	35	19,5	5,8	1,257	765	624	402	-	-	456
1740/606	35	23,0	6,5	1,257	896	730	471	-	-	556

PANEL PLUS DOUBLE



Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
732/506	46	15,6	4,3	1,218	504	413	271	-	-	456
732/606	46	18,4	5,0	1,218	581	477	312	-	-	556
1180/506	46	24,2	6,8	1,228	751	615	401	-	-	456
1180/606	46	28,5	7,9	1,228	892	731	476	-	-	556
1740/506	46	35,5	10,0	1,275	1070	870	558	-	-	456
1740/606	46	41,8	11,6	1,275	1271	1033	663	-	-	556


Thermal power measuring follows in accordance with EN 442.

Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options

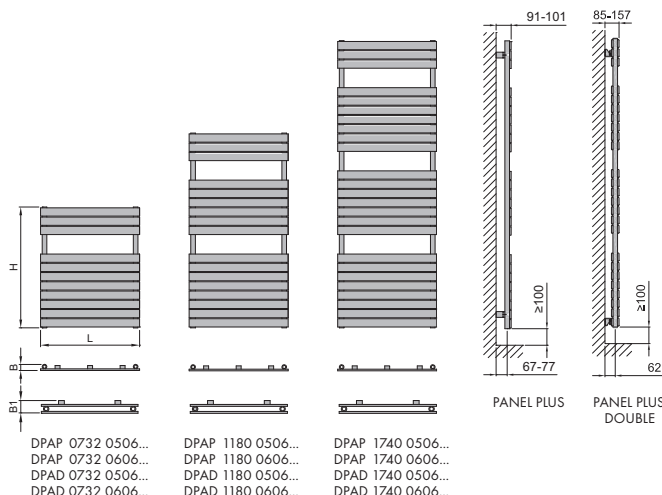

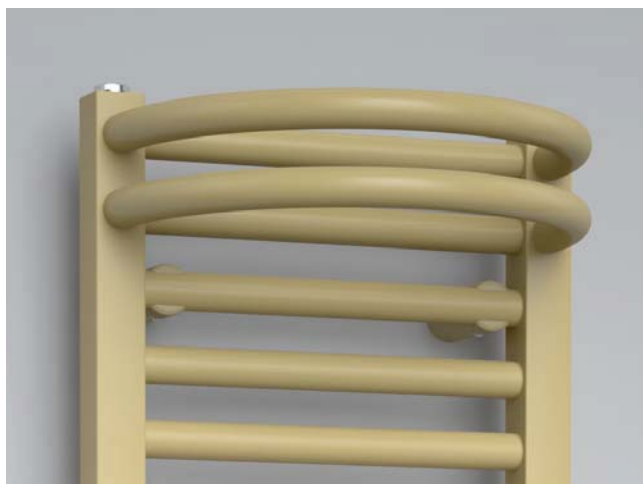

GIULIA

Material	steel pipes \varnothing 26 mm / steel profiles 35 x 35 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	20 + 6




GIULIA 1205 x 350



Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Connection span [mm]	
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1205/350	206	10,8	6,1	1,289	589	478	303	600	-	315

Thermal power measuring follows in accordance with EN 442.

Accessories (page 59, 60 and 61) is not part of the radiator.




Connection options

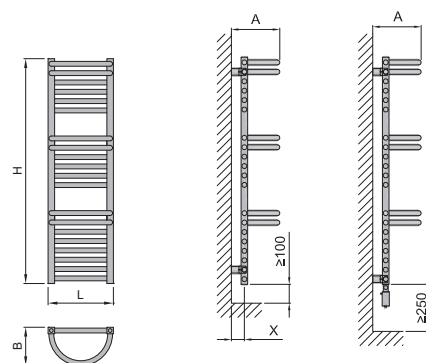

DGUL 1205 0350...

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	261 - 271	73 - 83
Metal brackets (Other colours)	257 - 267	69 - 79

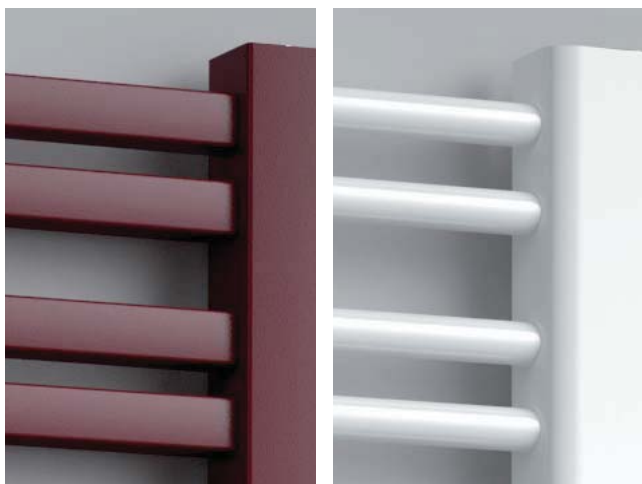

FILA, FILO

Material FILA	steel profiles 40 × 40 mm / steel profiles 25 × 25 mm
Material FILO	steel profiles 40 × 40 mm / steel pipes Ø 26mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles (pipes)	22, 30



FILA 1610 × 600



FILO 1610 × 610



FILA

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1210/600	54	25,1	7,7	1,20	690	568	374	700	-	50
1610/600	54	34,0	10,4	1,20	933	768	505	900	-	50

FILO

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
1210/610	54	23,5	6,9	1,25	675	551	356	700	-	50
1610/610	54	31,9	9,3	1,25	914	746	483	900	-	50


Thermal power measuring follows in accordance with EN 442.

The cover of radiator in other colour is available per order.


Accessories (page 59, 60 and 61) is not part of the radiator.

RIGHT DESIGN

LEFT DESIGN

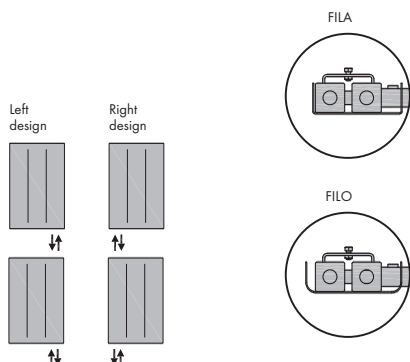

Connection options

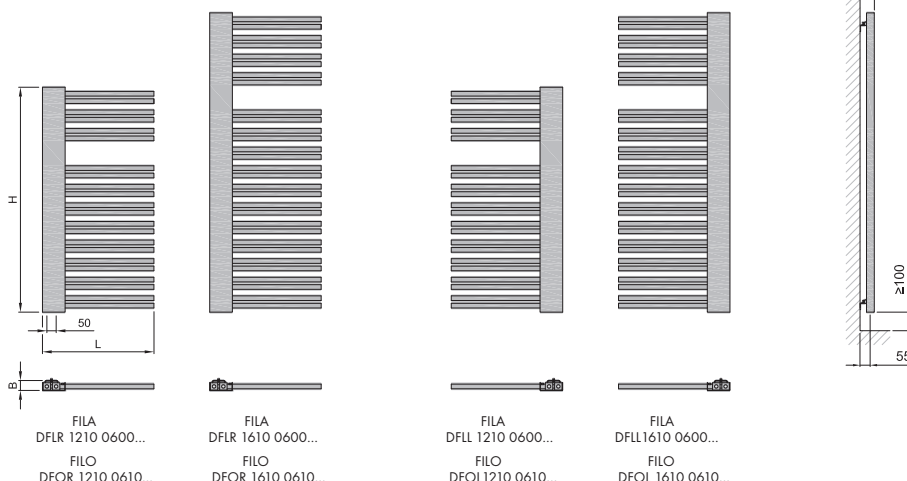



TIZIO	
Material	steel pipes \varnothing 22 mm / steel profiles D1/2 52 x 37 mm
Connection thread	4 x G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of pipes	14, 22, 33






TIZIO 1180 x 600



Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
730/500	37	6,4	4,5	1,260	312	254	164	300	200	429
730/600	37	7,3	5,0	1,260	366	298	192	400	300	529
1180/500	37	10,2	7,1	1,277	486	395	253	500	300	429
1180/600	37	11,6	7,9	1,277	569	462	296	600	400	529
1765/500	37	15,2	10,7	1,260	722	588	379	700	500	429
1765/600	37	17,3	11,8	1,260	846	689	444	900	600	529

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30%.
 Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)

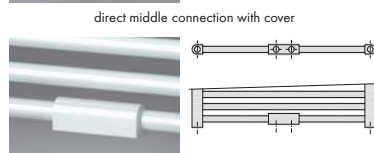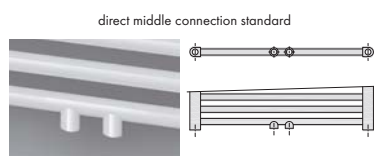

Connection options

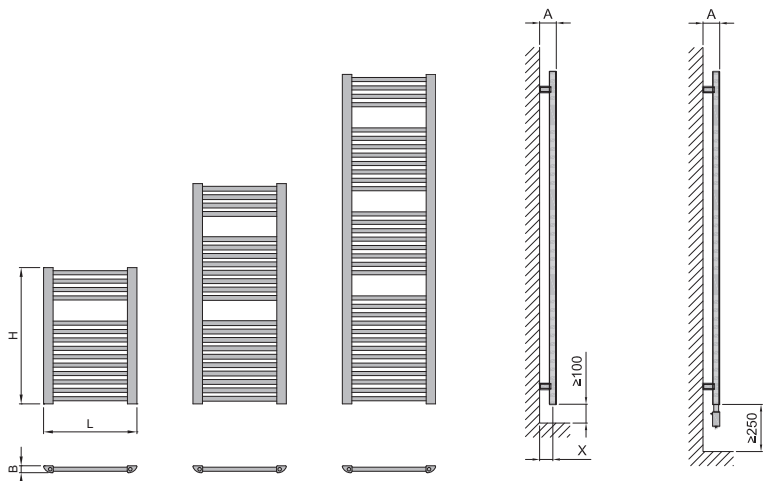

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	92-102	73-83
Metal brackets (Other colours)	88-98	69-79

- DTIZ 0730 0500... DTIZ 0730 0600...
- DTIZ 1180 0500... DTIZ 1180 0600...
- DTIZ 1765 0500... DTIZ 1765 0600...

TIZIO RADIUS



TIZIO RADIUS

Material	steel pipes \varnothing 22 mm / steel profiles D1/2 52 x 37 mm
Connection thread	4 x G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of pipes	14, 22, 33



TIZIO RADIUS 1180 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
730/500	78	6,6	4,5	1,263	316	257	166	300	200	443
730/600	102	7,5	5,0	1,263	370	302	194	400	300	546
1180/500	78	10,4	7,3	1,272	492	400	257	500	300	443
1180/600	102	11,8	8,0	1,272	576	468	301	600	400	546
1765/500	78	15,6	10,9	1,259	741	604	390	700	500	443
1765/600	102	17,7	12,0	1,259	869	708	457	900	600	546

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)

radius middle connection standard

radius middle connection with cover

Connection options

DTIR 0730 0500...
DTIR 0730 0600...

DTIR 1180 0500...
DTIR 1180 0600...

DTIR 1765 0500...
DTIR 1765 0600...

	Length [mm]	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	500	113-122	62-72
	600	112-122	39-49
Metal brackets (Other colours)	500	107-117	56-66
	600	112-122	39-49

CALYPSO PLUS



CALYPSO PLUS


Material	steel pipes \varnothing 35 mm / steel pipes \varnothing 22 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	16, 25, 38





PALMYRA PLUS 1175 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
735/600	35	8,0	4,4	1,172	386	319	212	400	300	565
1175/600	35	12,5	7,0	1,272	643	523	336	600	400	565
1775/600	35	18,9	10,6	1,408	996	792	485	1000	700	565


Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options




DCAP 0735 0600...



DCAP 1175 0600...



DCAP 1775 0600...

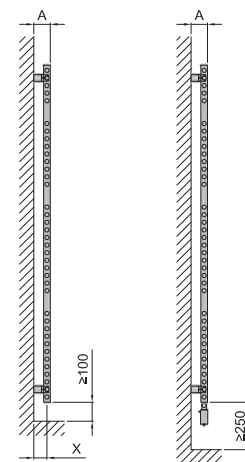

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	92-102	74-74
Metal brackets (Other colours)	87-97	69-79

CALYPSO VALVE

NEW



CALYPSO VALVE

Material	steel profiles D 35 × 41 mm, steel pipes Ø 22 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	14, 23, 35




CALYPSO VALVE 1215 × 600

Type H/L [mm]	Depth B [mm]	Weight* [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
775/600	35	9,0	4,3	1,26	415	338	218		50**
1215/600	35	13,3	6,9	1,26	660	538	347		50**
1775/600	35	18,8	10,2	1,26	982	800	516		50**



Thermal power measuring follows in accordance with EN 442.

* without valves and thermostatic head


** if connection to the floor - the pipes aren't centrally symmetric

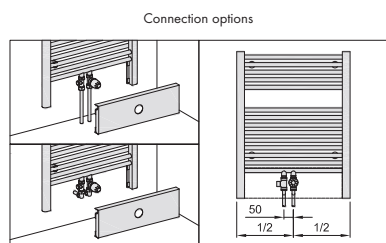

if connection to the floor - the pipes aren't centrally symmetric




DCAV 0775 0600...



DCAV 1215 0600...



DCAV 1775 0600...



Radiator colour	Thermohead colour
white RAL 9016	white
Other colours	chrome




SAPHIRO	
Material	steel pipes \varnothing 26 mm / steel profiles D35 x 41 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	14, 22, 33









SAPHIRO 1180 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
730/500	35	6,6	4,2	1,229	347	284	185	300	200	459
730/600	35	7,7	4,8	1,229	406	332	217	400	300	559
1180/500	35	10,5	6,6	1,272	546	444	285	600	400	459
1180/600	35	12,1	7,6	1,272	638	519	333	600	400	559
1765/500	35	15,6	9,9	1,249	836	682	442	800	600	459
1765/600	35	18,1	11,4	1,249	976	797	516	1000	700	559

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30%.
 Accessories (page 59, 60 and 61) is not part of the radiator.



Connection options




	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	93-103	75-85
Metal brackets (Other colours)	87-97	69-79

DSAP 0730 0500...
DSAP 0730 0600...

DSAP 1180 0500...
DSAP 1180 0600...

DSAP 1765 0500...
DSAP 1765 0600...

SAPHIRO PLUS

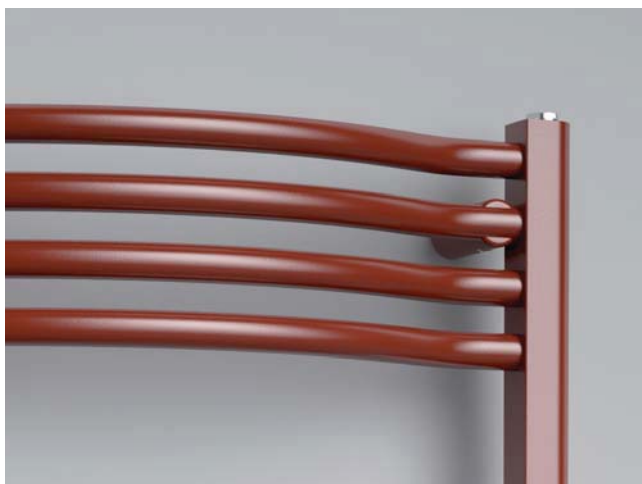

SAPHIRO PLUS


Material	steel pipes \varnothing 26 mm / steel profiles D35 mm \times 41 mm
Connection thread	4 \times G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	14, 22, 33





SAPHIRO PLUS 1180 \times 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input chrome [W]		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
730/600	83	7,9	4,8	1,240	428	350	227	400	300	559
1180/600	83	12,5	7,7	1,224	673	552	360	700	500	559
1765/600	83	18,6	11,6	1,234	1019	834	543	1000	700	559


Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~ 30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.




Connection options





DSPP 0730 0600...



DSPP 1180 0600...



DSPP 1775 0600...



	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	129-139	75-85
Metal brackets (Other colours)	123-133	69-79



POLO

Material	steel pipes \varnothing 20 mm / steel profiles D30 x 35 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	15, 19, 24, 32, 38



POLO 1135 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
695/450	30	5,2	2,5	1,270	298	242	156	300	200	415
695/500	30	5,6	2,7	1,270	327	266	171	300	200	465
695/600	30	6,5	3,0	1,270	384	312	201	400	300	565
695/750	30	7,9	3,6	1,226	462	379	247	500	300	715
935/450	30	7,0	3,3	1,269	391	318	204	400	300	415
935/500	30	7,5	3,6	1,269	429	349	224	400	400	465
935/600	30	8,7	4,1	1,269	504	410	264	500	400	565
935/750	30	10,5	4,8	1,269	612	498	320	600	500	715
1135/450	30	8,4	4,0	1,269	467	380	244	500	300	415
1135/500	30	9,0	4,3	1,269	512	417	268	500	400	465
1135/600	30	10,4	4,9	1,269	602	490	315	600	400	565
1135/750	30	12,6	5,7	1,226	742	608	396	700	500	715
1535/450	30	11,2	5,4	1,268	632	514	331	600	400	415
1535/500	30	12,1	5,8	1,268	693	564	363	700	500	465
1535/600	30	13,9	6,5	1,268	815	663	427	800	600	565
1535/750	30	16,9	7,7	1,226	991	812	530	1000	700	715
1775/450	30	13,1	6,3	1,267	739	601	387	700	500	415
1775/500	30	14,2	6,8	1,267	810	659	424	800	600	465
1775/600	30	16,4	7,7	1,267	952	775	498	1000	700	565
1775/750	30	19,9	9,1	1,226	1170	959	625	1200	800	715

Thermal power measuring follows in accordance with EN 442. Chrome surface treatment reduces heating capacity by ~30 %. Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)


direct middle connection standard

direct middle connection with cover

Connection options

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	88-98	73-83
Metal brackets (Other colours)	84-94	69-79

POLO RADIUS

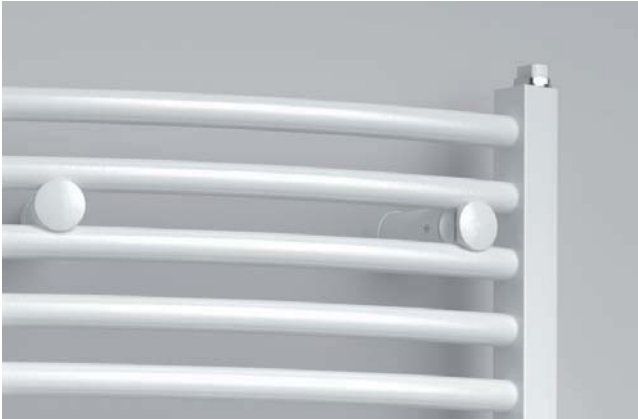

POLO RADIUS

Material	steel pipes \varnothing 20 mm / steel profiles D30 x 35 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	15, 19, 24, 32, 38



POLO RADIUS 1135 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
695/450	58	5,3	2,5	1,275	302	245	157	300	200	415
695/500	66	5,7	2,7	1,275	331	269	173	300	200	465
695/600	86	6,6	3,1	1,275	389	316	203	400	300	565
695/750	75	7,9	3,6	1,275	470	382	245	500	300	715
935/450	58	7,1	3,4	1,271	396	322	207	400	300	415
935/500	66	7,7	3,6	1,271	434	353	227	400	300	465
935/600	86	8,9	4,1	1,271	510	415	266	500	400	565
935/750	75	10,6	4,9	1,271	627	510	328	600	400	715
1135/450	58	8,5	4,1	1,267	473	385	247	500	300	415
1135/500	66	9,2	4,4	1,267	518	422	271	500	400	465
1135/600	86	10,6	5,0	1,267	609	496	319	600	400	565
1135/750	75	12,7	5,9	1,267	753	613	394	700	500	715
1535/450	58	11,4	5,5	1,266	638	520	334	600	400	415
1535/500	66	12,3	5,9	1,266	700	570	367	700	500	465
1535/600	86	14,2	6,7	1,266	823	670	431	800	600	565
1535/750	75	17,0	7,9	1,266	1007	819	527	1000	700	715
1775/450	58	13,4	6,4	1,263	759	618	398	700	500	415
1775/500	66	14,5	6,9	1,263	832	678	436	800	600	465
1775/600	86	16,7	7,8	1,263	978	796	513	1000	700	565
1775/750	75	20,1	9,3	1,263	1189	968	623	1200	800	715

Thermal power measuring follows in accordance with EN 442. Chrome surface treatment reduces heating capacity by ~30 %. Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)


radius middle connection standard

radius middle connection with cover

Connection options

	Length [mm]	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	450	108-118	66-76
	500	109-119	59-69
	600	112-122	41-51
Metal brackets (Other colours)	450	103-113	61-71
	500	104-114	54-64
	600	103-113	32-42
	750	126-136	67-77

DPOR 0695 0450... DPOR 0935 0450... DPOR 1135 0450... DPOR 1535 0450... DPOR 1775 0450...
 DPOR 0695 0500... DPOR 0935 0500... DPOR 1135 0500... DPOR 1535 0500... DPOR 1775 0500...
 DPOR 0695 0600... DPOR 0935 0600... DPOR 1135 0600... DPOR 1535 0600... DPOR 1775 0600...
 DPOR 0695 0750... DPOR 0935 0750... DPOR 1135 0750... DPOR 1535 0750... DPOR 1775 0750...

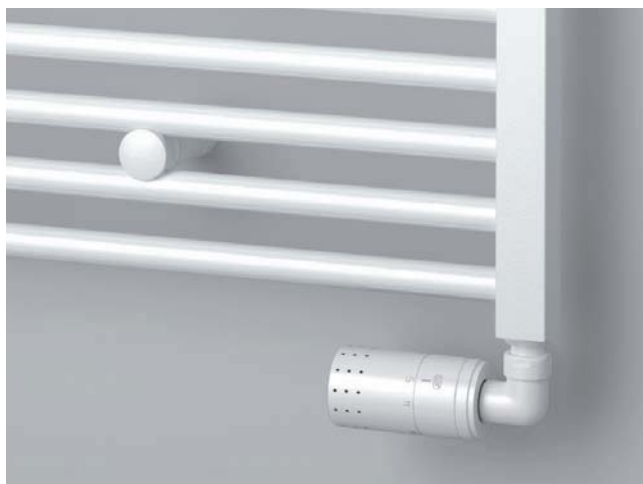

ALUMIO	
Material	steel pipes \varnothing 20 mm / steel profiles 30 x 30 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	15, 24, 32




ALUMIO 1135 x 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input paint [W]	Recommended power input chrome [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C			
695/500	30	5,7	2,6	1,230	324	265	173	300	200	470
695/600	30	6,6	3,0	1,230	380	311	203	400	300	570
1135/500	30	9,2	4,2	1,249	511	417	270	500	400	470
1135/600	30	10,6	4,8	1,249	599	489	316	600	500	570
1535/500	30	12,3	5,7	1,244	705	576	374	700	500	470
1535/600	30	14,1	6,4	1,244	826	675	438	800	600	570



Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 59, 60 and 61) is not part of the radiator.

POSSIBILITY OF THE MIDDLE CONNECTION (per order)


direct middle connection standard

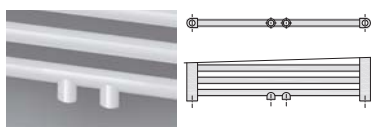

direct middle connection with cover

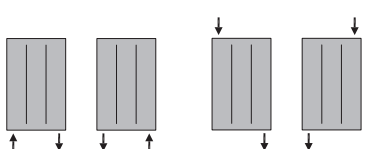

Connection options

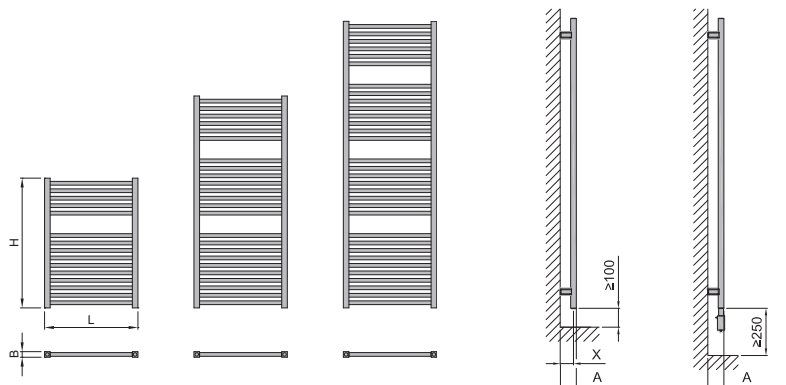

DALU 0695 0500...
DALU 0695 0600...

DALU 1135 0500...
DALU 1135 0600...

DALU 1535 0500...
DALU 1535 0600...

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	84-94	69-79
Metal brackets (Other colours)	88-98	73-83



AG Design heating bodies being usually made of steel profiles and tubes are constructed for bathroom and living room heating as well as for operation in all heating systems of housing and series constructions using only treated water as heating medium in forced circulation.

SURFACE TREATMENT

The procedure of surface treatment follows under a strict respect to environmental regulations. The aim is to ensure long-term corrosion resistance, mechanical ruggedness and hygienic compatibility. Radiators ground with sand blast and degreased have been coated with iron phosphate and varnish.

Finish coat is fired powder epoxy-polyester varnish in standard shape snow-white, RAL 9016. For other surcharged shades, see AG Colour Chart. Chromium-plate is only possible in marked types. Chrome coat has been applied on a finished product by the way of electro plating. Radiators bearing the INOX symbol are made of brushed stainless steel.

PERIOD OF RISK

The warranty applies to malfunctions and faults, which have appeared within the period of risk. The period of risk for painted (varnish) radiators, chrome and stainless steel radiators amounts to five (5) years from the from the purchase date. The period of risk for electric bar bearing and electronic regulator amounts to two (2) years from the purchase date. Repairs of electric heaters within the period of risk shall only be performed in a place agreed upon.

WARRANTY

Customer loses any claim for warranty service in case that the heating body was:

- installed in a building, facility or room with high humidity, such as public WC, car washing room, stable, cowshed, indoor swimming pool and the like;
- stored outdoor or under a temperature lower than -5°C ;
- damaged by inside corrosion due to unsuitable chemical composition of the heating medium, having caused a leaking;

- deformed due to inappropriate transport or exceeding of working pressure maximum;
- damaged mechanically or due to inappropriate handling by customer or carrier;
- damaged willingly or when defaults appeared due to a natural disaster or other impact;
- used and kept in operation in spite of the claimed default, whereas the usage of so faulty product has inflicted the state thereof in so far that the claimed default cannot be assessed accordingly;
- unprofessionally installed or when a modification has followed without prior seller's consent;
- used for other than the intended purpose, such as for drying of wet textiles directly on the convector body, which has lead to damage of the surface treatment;
- damaged by using of unsuitable cleaners, not recommended for the given radiator surface;
- purchased against a reduced price due to a default, the customer was noticed of.


Any warranty claim shall be refused, if the Warranty Certificate is not filled in, shows unauthorized changes or is not available. The warranty does not apply to unordinary wear and tear. If no default caused by the manufacturer is found out, the warranty conditions are taken as unfulfilled and costs connected with experts' travel shall be borne by customer. Products being the objects of claim and sent to manufacturer by postal service shall be possibly delivered in original packing or dully packed, to eliminate any further damage due to transportation. Damages caused by such transportation of a claimed product shall not be taken in consideration.

PACKING & INSTALLATION

The assembling kit contains elements for installation on the wall and assembly instructions. Radiator anchoring follows by means of consoles in 3 or 4 points. Kit elements: concrete number of consoles, 1 air release valve, 1 dummy plug, screws and masonry expanding plugs in number complying with consoles. Radiators are packed in three-layer-cardboard-cases with plastic corner protection and fixed by shrink foil. Heaters equipped with electric bar bearing an electronic regulator have special packing eliminating a damage of the regulator plastic case.

HEATING POWER & CONNECTION

Heating power changes in dependence on heater's interconnection in the heating system. Lower connection downwards decreases heating power by $\sim 10\%$, upper connection upwards should be totally eliminated. Heating power also changes in dependence on heater's placing (e.g. when installed in other than peripheral wall), position or using of coverings and different window sills. Chromium-plate as surface treatment reduces heating power by nearly $\sim 30\%$. Connection alternations are available as per special orders, see information, pages 54 and 55 - "Tailored Radiator".

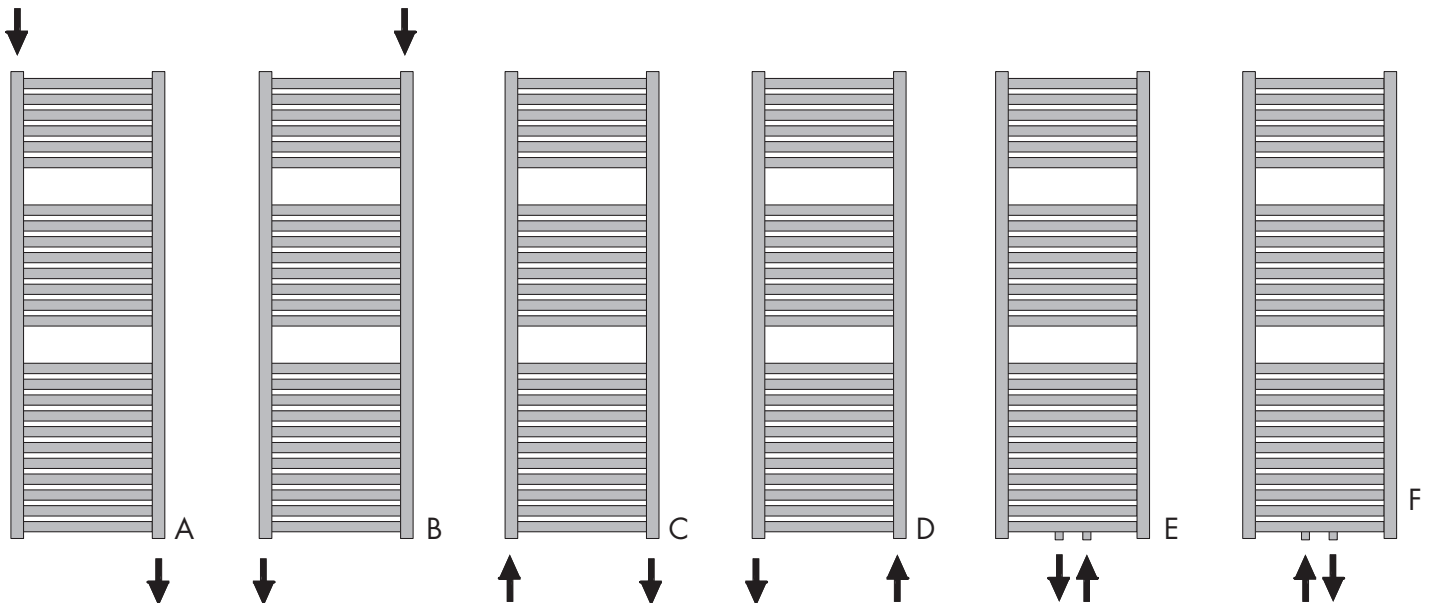



POSITION NO.

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.	13.	14.	15.	16.	17.
D	T	O	N	0	6	9	5	0	6	0	0	F	K	0	1	-
MODEL				HEIGHT			LENGTH				CONN.		COLOUR CODE		ATYP	

ALUMIO 695/600 MM, ELEKTRIC WITH CONTROL UNIT FORTE, STANDARD CONNECTION 4×G1/2", COLOUR RAL 9016

1, 2, 3, 4	Melody	NAME ABBREVIATION		
D	A	L	U	ALUMIO
D	Q	U	A	QUADRATO
D	P	A	L	PANEL LIGHT
D	P	A	P	PANEL PLUS

5, 6, 7, 8	HEIGHT (mm)	0	6	9	5
		1	5	3	5

9, 10, 11, 12	LENGTH (mm)	0	6	0	0
		0	5	0	0

13	HEATING UNIT TYPE	
S	STANDARD RADIATOR TO BE CONNECTED TO CENTRAL HEATING SYSTEM	
M	ELECTRIC RADIATOR - HEATING ROD WITH ANALOG CONTROL UNIT MINI	
F	ELECTRIC RADIATOR - HEATING ROD WITH ELECTRONIC CONTROL UNIT FORTE	

POSSIBLE COMBINATION OF RADIATOR AND HIS CONNECTION	
S-K	STANDARD RADIATOR + CLASSIC VERSION CONNECTION
S-M	STANDARD RADIATOR + MIDDLE CONNECTION
S-D	STANDARD RADIATOR + MIDDLE CONNECTION (COVER)
S-B	STANDARD RADIATOR + SIDE CONNECTION
M-K	ELECTRICAL RADIATOR WITH REGULATOR MINI + CLASSIC VERSION CONNECTION
F-K	ELECTRICAL RADIATOR WITH REGULATOR FORTE + CLASSIC VERSION CONNECTION

14	CONNECTION	
K	STANDARD CONNECTION VERSION OF THE TUBULAR RADIATOR 4×G1/2"	
M	MIDDLE CONNECTION WITH SPAN 50 MM 2×G1/2"	
D	MIDDLE CONN. SPAN 50 MM 2×G1/2" WITH COVER	
B	SIDE CONNECTION 2×G1/2"	

15, 16 COLOUR CODE											
CODE	RAL	CODE	RAL	CODE	RAL	CODE	RAL	CODE	RAL	CODE	RAL
01	9016	12	1015	60	S01	66	S07	72	S13	80	CHROME
02	9010	19	9005	61	S02	67	S08	73	S14	81	INOX
04	9001	20	9006	62	S03	68	S09	74	S15	82	SATIN
-		39	7024	63	S04	69	S10	75	S16	83	S19
-		45	6019	64	S05	70	S11	76	S17	84	S20
-		46	8017	65	S06	71	S12	77	S18	-	-

Unoccupied number positions are free and allow adding of other colour tints.

17	ATYPICAL
A	ATYPICAL UNIT FROM THE TAILORED RADIATOR OFFER

ABBREVIATIONS OF AG DESIGN RADIATORS NAMES FOR THE PURPOSE OF CODING

D X D O DRITO INOX	D S M U SIMETRIA	D D D H DOMINO DOUBLE HORIZONTAL	D F L L FILA - LEFT
D X E L ELIDA INOX	D S M D SIMETRIA DOUBLE	D Q U A QUADRATO	D F O R FILO - RIGHT
D X S Q SQUARE INOX	D S M L SIMETRIA LIGHT	D F R O FIORENZO	D F O L FILO - LEFT
D X P I PIANI INOX	D S M M SIMETRIA MIRROR	D I K O IKARO	D T I Z TIZO
D X C A CALYPSO INOX	D C U U CUBO	D I K R IKARO RADIUS	D T I R TIZO RADIUS
D X R C CALYPSO RADIUS INOX	D C U D CUBO DOUBLE	D I K D IKARIO DOUBLE	D C A P CALYPSO PLUS
D C A L CALYPSO CHROME	D A R U ARIBO	D P A N PANEL LIGHT	D P K L CALYPSO VALVE
D C A C CALYPSO RADIUS CHROME	D A R D ARIBO DOUBLE	D P A P PANEL PLUS	D S A P SAPHIRO
D G B G* SCELTA GLASS, round. corners, shiny	D D O M DOMINO	D P A D PANEL PLUS DOUBLE	D S P P SAPHIRO PLUS
D G B M* SCELTA GLASS, round. corners, matt	D D D L DOMINO LIGHT	D T O R TORO	D A L U ALUMIO
D G A G* SCELTA GLASS, angular corners, shiny	D D M D DOMINO DOUBLE	D T O E TORO EXTRA	D P O L POLO
D S M R SCELTA MIRROR	D P U L PULITO	D D O P TORO PLUS	D P O R POLO RADIUS
D S C P SCELTA PLAN	D S H D SIMETRIA DOUBLE HORIZONTAL	D G U L GULIA	
D M D R MODERNO	D A R I ARIBO DOUBLE HORIZONTAL	D F L R FILA - RIGHT	

While ordering the combined heating kit, spatial fixing and other parameters resulting from the product specification please write up verbally as a note to the order.

* code of SCELTA GLASS radiator is specific. See page 16 under the sketches (PURE WHITE DGBG 1810 0620 SMA7, COOL ICE DGBM 1810 0620 SMA8, PASTELL YELLOW DGAG 1810 0620 SMA2)

ORDER EXAMPLE

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.	13.	14.	15.	16.	17.
D	T	O	N	1	1	3	5	0	5	0	0	S	K	0	2	-
MODEL				HEIGHT			LENGTH				CONN.		COLOUR CODE		ATYP	

Alumio 1135/500 mm, Standard radiator, Standard connection 4×G1/2", colour RAL 9010.

Note: Combined heating kit, heating rod with MINI control unit.

(The manufacturer determines recommended power input of the heating rod. Specific power input in above-mentioned case is 500 W.)

F10 & F20 RADIATORS ORDERING



POSITION NO.																
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.	13.	14.	15.	16.	17.
F	1	0	H	0	5	6	0	1	4	0	0	A	B	0	1	-
MODEL			HEIGHT				LENGTH				CONN.		COLOUR CODE		ATYP	

RADIATOR U10 HORIZONTAL, HEIGHT 560 MM, LENGTH 1400 MM, CONNECTION AB, COLOUR RAL 9016

1, 2, 3, 4	RADIATOR TYPE
U10 H	Radiator, 1 heating plate, horizontal
U20 H	Radiator, 2 heating plate, horizontal
U10 V	Radiator, 1 heating plate, vertical
U10 L	Radiator, 1 heating plate, vertical, Lux

13, 14	CONNECTION
U10, U20	AB, CD, BD, DB, AD, CB, AC, CA, EF, FE
U10V, U10L	BD, DB

15, 16	COLOUR CODE
CODE	RAL
01	9016
20	9006


U10 & U20 ARE AVAILABLE IN OTHER RAL COLOURS PER ORDER.

5, 6, 7, 8	HEIGHT (mm)	0	5	6	0
		1	8	0	0





9, 10, 11, 12	LENGTH (mm)	0	2	8	0
		0	4	2	0
		0	5	6	0
		0	7	0	0
		1	0	0	0
		1	4	0	0
		1	8	0	0

17	ATYPICAL
A	ATYPICAL DESIGN, SPECIFIED IN NOTE BEHIND PRODUCT CODE


U10H, U20H

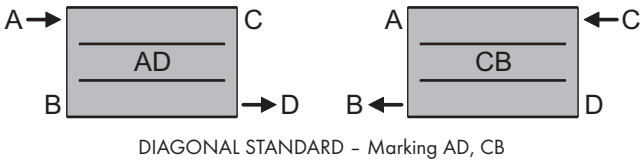

U10H, U20H

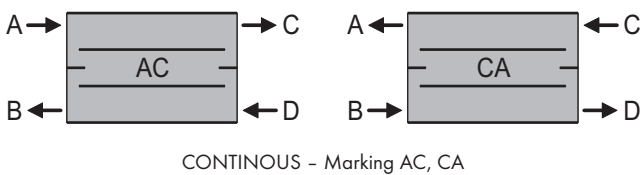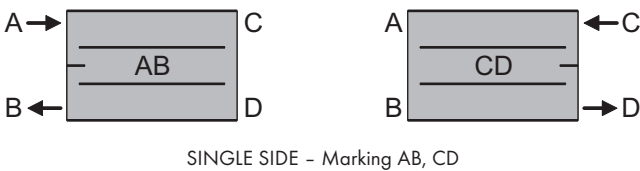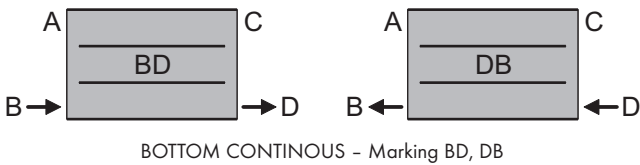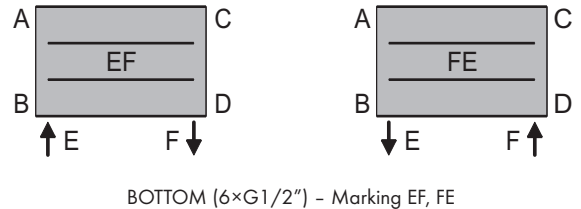

U10V, U10L

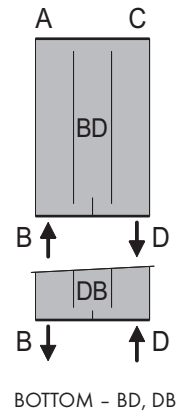

VALVE AND MIDDLE CONNECTION IS AVAILABLE PER ORDER.
F10H IS NOT AVAILABLE WITH AC, CA CONNECTION.



Please make a copy for following using.

ORDER NUMBER

CUSTOMER
Company _____
Tel./fax _____
Contact person _____
E-mail _____

PRODUCT
Radiator type _____

Colour (RAL) _____
Please fill in all required information. The later complaints shall not be considered.

LENGTH ADAPTATION

Length _____ mm

HEIGHT ADAPTATION

Length _____ mm

HEIGHT

BEVELLING

Height A _____ mm

Height B _____ mm

Length _____ mm

CONNECTION OPTIONS

side left

bottom

side right

Span A _____ mm

Span B _____ mm

FULL FRAME

Height _____ mm

Length _____ mm

HEIGHT

LENGTH

TAILORED RADIATORS AND MODIFICATION OPTIONS





Name	Standard height range	Height range	Increase [mm]	Standard length range	Length range	Increase [mm]	Surface treatment	Combined / electric version	Beveling	Middle connection	Side connection	One-sided spatial fixing	Standard number of pipes
SCELTA	1206, 1806	606-2006	50	456, 608	304-988	76	komaxit, stainless steel			only MC			6, 8
MODERNO	1206, 1806	609-1995	63	288, 477, 603	288-981	63	komaxit, stainless steel			only MC			5, 8, 10
SIMETRIA	1800	600-2000	10	298, 450, 602	298-982	76	komaxit			only MC			4, 6, 8
SIMETRIA DOUBLE	1800	600-2000	10	298, 450, 602	298-754	76	komaxit			only MC			8, 12, 16
SIMETRIA LIGH	1800	600-2000	10	274, 442, 610	274-946	56	komaxit			only MC			5, 8, 11
SIMETRIA MIRROR	1800	600-2000	10	602	298-982	76	komaxit			only MC			5
CUBO	1800	600-2000	10	318, 462, 606	318-990	48	komaxit			only MC			7, 10, 13
CUBO DOUBLE	1800	600-2000	10	318, 462, 606	318-606	48	komaxit			only MC			14, 20, 26
ARIBO, ARIBO DOUBLE	1800	600-2000	10	300, 480, 600	300-984	36	komaxit			✓			8, 13, 17; 16, 26, 34
DOMINO	1800	600-2000	10	300, 480, 600	300-984	36	komaxit			✓			8, 13, 17
DOMINO LIGHT, DOMINO DOUBLE	1800	600-2000	10	300, 480, 600	300-984	36	komaxit			✓			8, 13, 17; 16, 26, 34
PULITO	1800	600-2000	10	535, 670, 805	535-985	45	komaxit			✓			12, 15, 18
SIMETRIA DOUBLE HORIZONTAL	602	298-982	76	1000, 1400, 1800	600-2000	10	komaxit						16
ARIBO DOUBLE HORIZONTAL	576	576	-	1000, 1400, 1800	604-1980	36	komaxit			✓			56, 78, 100
DOMINO DOUBLE HORIZONTAL	576	576	-	1000, 1400, 1800	604-1980	36	komaxit			✓			56, 78, 100
QUADRATO	1255, 1755	605-1955	50	500, 600	300-1000	10	komaxit			✓			21, 29
FIORENZO	1182, 1758	606-1998	48	600	300-1000	10	komaxit			✓			21, 31
IKARO	732, 1212, 1772	612-1972	40	500, 600	400-1000	10	komaxit			✓			14, 24, 36
IKARO RADIUS	732, 1212, 1772	612-1972	40	500, 600	500-600	10	komaxit			✓			14, 24, 36
IKARO DOUBLE	732, 1212, 1772	612-1972	40	600	400-1000	10	komaxit			✓			28, 48, 72
PANEL LIGHT	725, 1180, 1765	660-1765	65	500, 600	300-1000	10	komaxit			✓			10, 16, 24
PANEL PLUS	732, 1180, 1740	620-1964	56	506, 606	400-1000	10	komaxit			✓			11, 17, 25
PANEL PLUS DOUBLE	732, 1180, 1740	620-1964	56	506, 606	400-1000	10	komaxit			✓			22, 34, 50
TORO, TORO PLUS	1180	690-1670	35	600	500, 600	-	komaxit			only MC			25
TORO EXTRA	1180	690-1670	35	800	600, 800	-	komaxit			only MC			25
SULIA	1205	605-1955	50	350	350	-	komaxit			✓			20+6
FILA	1210, 1610	1210, 1610	-	600	500, 600	-	komaxit			only MC			22, 30
FIL0	1210, 1610	1210, 1610	-	610	510, 610	-	komaxit			only MC			22, 30
TIZO	730, 1180, 1765	640-1990	45	500, 600	300-1000	10	komaxit			✓			14, 22, 33
TIZO RADIUS	730, 1180, 1765	640-1990	45	450, 500, 600, 750	450-750	10	komaxit			✓			14, 22, 33
CALYPSO PLUS	735, 1175, 1775	615-1975	40	600	300-1000	10	komaxit			✓			16, 25, 38
SAPHIRO	730, 1180, 1765	640-1990	45	500, 600	300-1000	10	komaxit			✓			14, 22, 33
SAPHIRO PLUS	730, 1180, 1765	640-1990	45	600	500, 600	-	komaxit			✓			14, 22, 33
ALUMIO	695, 1135, 1535	615-1975	40	500, 600	300-1000	10	komaxit			✓			15, 24, 32
POLO	695, 935, 1135, 1535, 1775	615-1975	40	450, 500, 600, 750	300-1000	10	komaxit			✓			15, 19, 24, 32, 38
POLO RADIUS	695, 935, 1135, 1535, 1775	615-1975	40	500, 600	450-750	10	komaxit			✓			15, 19, 24, 32, 38

A typical version on request: DRITO INOX, ELIDA INOX, SQUARE INOX, PIANI INOX, CALYPSO INOX, CALYPSO RADIUS INOX, CALYPSO CHROME, CALYPSO RADIUS CHROME, SCETIA MIRROR, CALYPSO VALVE

Name	Standard height range	Height range	Increase [mm]	Standard length range	Length range	Increase [mm]	Surface treatment	CH	Combined / electric version	Beveling	Middle connection	Side connection	One-sided spatial fixing	Standard number of pipes
PULITO	1800	600-1800	10	535, 670	535-715	45	chrome				✓			12, 15, 18
QUADRATO	1255, 1755	605-1755	50	500, 600	300-600	10	chrome			✓				21, 29
IKARIO	732, 1212, 1772	612-1772	40	500, 600	300-750	10	chrome			✓				14, 24, 36
IKARIO RADIUS	732, 1212, 1772	612-1772	40	500, 600	500-600	10	chrome			✓				14, 24, 36
TIZO	730, 1180, 1765	640-1765	45	500, 600	300-750	10	chrome			✓				14, 22, 33
TIZO RADIUS	730, 1180, 1765	640-1765	45	450, 500, 600, 750	450-750	10	chrome			✓				14, 22, 33
CALYPSO PLUS	735, 1175, 1775	615-1775	40	600	300-750	10	chrome			✓				16, 25, 38
SAPHIRO	730, 1180, 1765	640-1765	45	500, 600	300-750	10	chrome			✓				14, 22, 33
SAPHIRO PLUS	730, 1180, 1765	640-1765	45	600	500, 600	-	chrome			✓				14, 22, 33
ALUMIO	695, 1135, 1535	615-1775	40	500, 600	300-750	10	chrome			✓				15, 24, 32
POLO	695, 935, 1135, 1535, 1775	615-1775	40	450, 500, 600, 750	300-750	10	chrome			✓				15, 19, 24, 32, 38
POLO RADIUS	695, 935, 1135, 1535, 1775	615-1775	40	500, 600	450-750	10	chrome			✓				15, 19, 24, 32, 38

CHROME VERSION



The chosen type of radiator marked with a symbol  can be operated as a separate electric or  combined heating radiator. The radiator is fitted with a heating rod of the appropriate output and a regulation unit.

ELECTRIC RADIATORS


Electric radiators come with a preinstalled heating rod, the radiator is filled with anti-corrosive antifreeze fluid (effective up to $-5\text{ }^{\circ}\text{C}$) and is tested and sealed. The radiator can be used immediately after being purchased and correctly installed. Regulator in white colour – standard, for Chrome and Inox – silver colour.

COMBINED RADIATORS

The radiator comes with the basic apparatus. The heating rod and thermostat are enclosed. The unit includes a chrome T-piece for connection to the heating system. The thermostatic valve is installed on the opposite side to the thermostat. When operated electrically it is necessary to close the thermostatic valve so the hot water does not leak into the heating system.

Regulator in white colour – standard, for Chrome and Inox – silver colour.

PROPORTIONING THE HEATING ROD

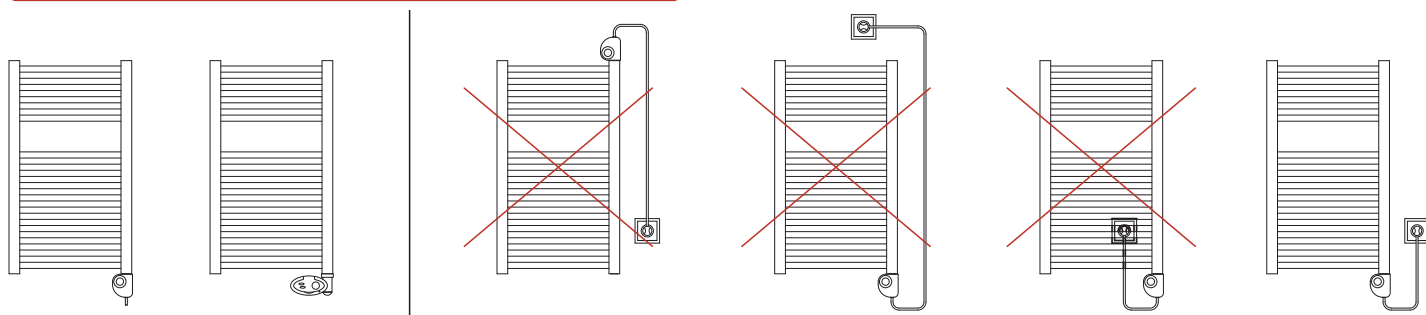


LOCATION OF THE ELECTRIC RADIATOR IN THE BATHROOM

Electric bathroom radiators and combined heating radiators shall be positioned in zones 2 and 3 (in accordance with EN norms). Electric radiator can be connected only to nominal voltage 230 V 50/60 Hz to corresponding socket in compliance with EN norms.

Radiators fitted with individual rods can be placed as high as the given protection zones allow:

MINI protection IPX4 zone 2 and 3

FORTE protection IPX4 zone 2 and 3

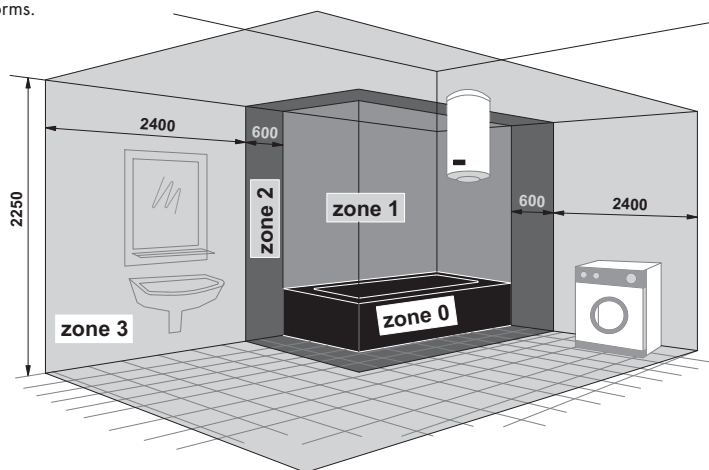

BASIC RULES FOR INSTALLATION AND USING ELECTRIC AND COMBINED RADIATORS

- The thermostat must be installed in a vertical position with the mains line attached from below
- The output of the heating rod is selected based on the recommendations for the individual radiator. The use of heating rods with a higher output does not increase the thermal output, on the contrary it shortens its lifespan
- The radiator binding plugs must not be loosened
- Radiators intended for bathrooms must be installed so that persons in the bath or shower cannot touch the contact makers or other control appliances. Incorrect installation could damage the appliance or cause electric shock or burns
- The radiator must not be placed directly below a plug socket. The suitability of the plug socket should be tested by a professional electrician
- The radiator must be installed at least 25 cm from the floor.
- The relevant national legislation should be observed when assembling the radiator outside of the Poland
- Thermostats are connected to the 230V 50Hz electrical mains using a movable terminal with a plug and normalized socket installed pursuant to national standards. The appliance must be protected by a (differential) fuse with a 30 mA release current.
- Protection against electric shock must be provided pursuant to national legislation
- Should the appliance be permanently attached to the mains a circuit breaker must be fitted to the thermostat terminal and be accessible for servicing.
- Connection to the electrical mains and testing of correct installation must be performed by a professional electrician.




MINI and FORTE regulators are attached to the heating rod and are set after the radiators are installed with heating rods.

MINI

A basic heat regulator with a thermostat. The dial is used to regulate the temperature to between 7 and 35 °C. In the lowest position the thermostat is deactivated, in the highest position it is constantly on. Installation on the lower right conductor (on the left for TORO, TORO EXTRA).

TECHNICAL DATA:

- WORKING VOLTAGE: 230V/50 Hz
- MAX. OUTPUT OF THE HEATING ROD 2000 W
- PROTECTION CATEGORY: I
- PROTECTION: IPX4
- WORKING TEMPERATURE: 0-50 °C
- WORKING HUMIDITY: 0-85 % (WITHOUT CONDENSATION)
- TEMPERATURE RANGE 15-30 °C
- CONNECTION THREAD: G1/2" OUTER (ON THE HEATING ROD)
- CONNECTION: STRAIGHT ELECTRIC FLEX 120 CM ENDED BY PLUG
- COLOUR: WHITE (STANDARD)
..... SILVER (FOR CHROME AND STAINLESS STEEL)
- ZONE: 2 and 3

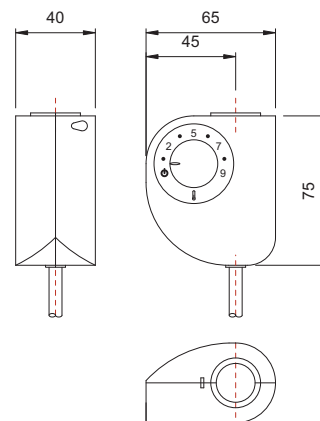


FORTE

This regulator has two buttons and a knob. To turn the regulator ON/OFF press bottom button: when regulator is ON, the LED is red when the appliance is powered (heating) and green when no power is applied. The desired temperature is selected from range between 15 to 30 °C with the setting knob. To activate the antifreeze function, turn the knob to minimum position and the temperature will be set up on 7 °C. In the maximum position is heating continuously. Pressing the top button the system goes to heating mode for 2 hours - the LED is blinking red, then it will return back to original settings. Installation on the lower right conductor (on the left for TORO, TORO EXTRA).

TECHNICAL DATA:

- WORKING VOLTAGE: 230V/50 Hz
- MAX. OUTPUT OF THE HEATING ROD 2000 W
- PROTECTION CATEGORY: I
- PROTECTION: IPX4
- WORKING TEMPERATURE: 0-50 °C
- WORKING HUMIDITY: 0-85 % (WITHOUT CONDENSATION)
- TEMPERATURE RANGE 7 °C, 15-30 °C
- CONNECTION THREAD: G1/2" OUTER (ON THE HEATING ROD)
- CONNECTION: STRAIGHT ELECTRIC FLEX 120 CM ENDED BY PLUG
- COLOUR: WHITE (STANDARD)
..... SILVER (FOR CHROME AND STAINLESS STEEL)
- ZONE: 2 and 3

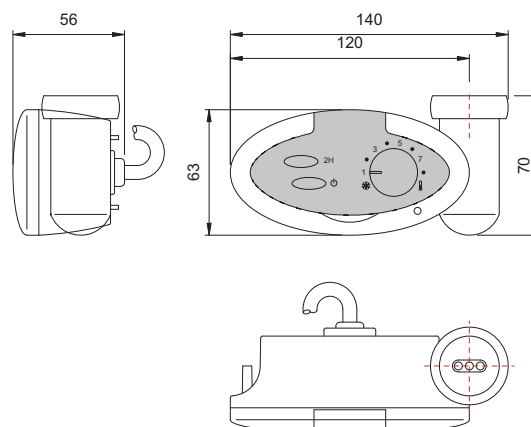


ELECTRIC RADIATOR



SET FOR COMBINED HEATING



CONNECTING EXAMPLE

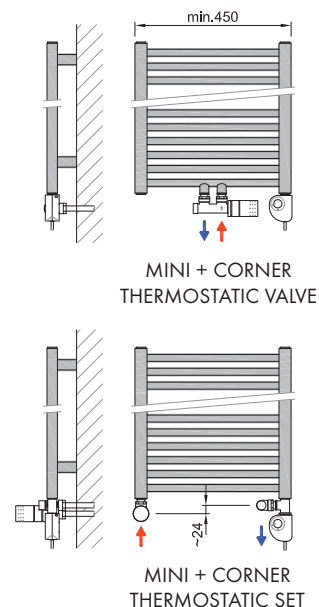



The electric radiator is a closed heating system with heating rods which is filled with anti-corrosive antifreeze and works independently from the central heating system. It is installed separately close to the electrical mains. Each radiator has a recommended specific electrical output which must not be increased for safety reasons.

SETS FOR COMBINED HEATING

The bathroom radiators are suitable for both hot water system with forced as well as system with gravity circulation. It is possible to equip with the combined heating set.

Combined heating is a combination of a bathroom radiator equipped with electric rod which is connected to the central heating system. The radiators equipped with set for combined heating can be used independently on central heating system especially within off-season.

Set for combined heating includes the heating bar with recommended wattage which depend on type of radiator, thermostat (see page 57) and chromed T-piece for connection to the radiator and central heating system. Is recommended to fit the radiator equipped with electric bar in bathroom according to position of the power outlet, the length of connecting cable and type protection IP.

SETS FOR COMBINED HEATING (HEATING ROD WITH REGULATOR + T-PIECE)

Heating rod power input [W]	Control unit Mini rod length [mm]	Control unit Forte rod length [mm]
200	320	320
300	400	400
400	480	480
500	560	560
600	680	680
700	730	730
800	820	820
900	920	920
1000	980	980
1200	1150	1150

ONE-SIDED SPATIAL FIXING

Some radiators are possible to mount in a space. The radiator is fit by profile perpendicular to the wall and fixed to the floor.

In case of ordering mounting sets for fixing of a radiator in a space make a note.





Towel rail 40 cm
CODE: O12IAG15-80



Adjustable towel rail -
triple 35 cm
CODE: O12AG14-80



Bath towel rack with
towel holder 40 cm
CODE: O12AG16-80



Towel rail 40 cm - radius
CODE: O12AG17-80



Towel ring
CODE: O12AG12-80



Single hook 4,5 cm
CODE: O12AG11-80



Revolving hook -
triple 6 cm
CODE: O12AG13-80

Type of radiator ISAN MELODY	Single hook 4,5 cm	Towel ring	Adjustable towel rail - triple 35 cm	Revolving hook - triple 6 cm	Towel rail 40 cm - radius	Towel rail 40 cm	Bath towel rack with towel holder 40 cm
Aribo	✓	✓	✓	✓			
Simetria	✓	✓	✓	✓			
Simetria Ligh	✓	✓	✓	✓			
Simetria Mirror	✓	✓	✓	✓			
Piani Inox	✓	✓		✓			
Drito Inox	✓	✓	✓	✓			
Polo	✓	✓	✓	✓		✓	✓
Polo Radius	✓	✓		✓	✓		
Ikaro	✓	✓	✓	✓		✓	✓
Ikaro Double	✓	✓	✓	✓			
Ikaro Radius	✓	✓		✓	✓		
Pulito	✓	✓	✓	✓			
Toro	✓	✓					
Toro Extra	✓	✓					
Toro Plus	✓	✓					
Saphiro	✓	✓		✓		✓	✓
Saphiro Plus	✓	✓		✓			
Panel Light	✓	✓		✓			
Panel Plus	✓	✓		✓			
Panel Plus Double	✓	✓		✓			
Calypso Inox	✓	✓		✓		✓	✓
Calypso Radius Inox	✓	✓		✓	✓		
Calypso Chrom	✓	✓	✓	✓		✓	✓
Calypso Radius Chrome	✓	✓	✓	✓	✓		
Calypso Plus	✓	✓	✓	✓		✓	✓
Calypso Valve							
Quadrato	✓	✓		✓		✓	✓
Tizio	✓	✓		✓		✓	✓
Tizio Radius	✓	✓		✓	✓		
Gulia	✓	✓		✓			
Fila	✓	✓		✓			
Filo	✓	✓		✓			
Alumio	✓	✓	✓	✓		✓	✓

Bathroom accessories are supplied only in chrome.

Bathroom accessories can be used only on radiators included in the table.

The period of risk for surface treatment is 15 years.



STAINLESS STEEL RAILS



Type of radiator AG GRZEJNIKI DESIGN	Length of body [mm]	Length of rail [mm]	Ordering code	Length of body [mm]	Length of rail [mm]	Ordering code	Length of body [mm]	Length of rail [mm]	Ordering code
Simetria	298 mm	342 mm	O15MN81-05	450 mm	512 mm	O15MN81-06	602 mm	652 mm	O15MN81-07
Simetria Doubl	298 mm	350 mm	O15MN81-20	450 mm	500 mm	O15MN81-21	602 mm	650 mm	O15MN81-22
Simetria Ligh	274 mm	342 mm	O15MN81-05	442 mm	512 mm	O15MN81-06	602 mm	652 mm	O15MN81-07
Simetria Mirror							602 mm	652 mm	O15MN81-07
U10L				560 mm	600 mm	O15MN81-10	700 mm	740 mm	O15MN81-11
U10V	280 mm	320 mm	O15MN81-08	420 mm	460 mm	O15MN81-09	560 mm	600 mm	O15MN81-10
Cubo	318 mm	365 mm	O15MN81-14	462 mm	510 mm	O15MN81-15	606 mm	650 mm	O15MN81-16
Cubo Double	318 mm	365 mm	O15MN81-17	462 mm	510 mm	O15MN81-18	606 mm	650 mm	O15MN81-19
Moderno	288 mm	342 mm	O15MN81-05	477 mm	512 mm	O15MN81-06	603 mm	652 mm	O15MN81-07
Scelta	456 mm	512 mm	O15MN81-02	608 mm	652 mm	O15MN81-03			
Scelta Glass							620 mm	650 mm	O15MN81-12 brushed
Scelta Glass							620 mm	650 mm	O15MN81-23 polished
Scelta Mirror				456 mm	512 mm	O15MN81-02	608 mm	652 mm	O15MN81-03



SENSITIVE CHROME
THERMOSTATIC HEAD CHROME
CODE: 484000360



CORNER THERMOSTATIC SET
CODE: 484000430



DIRECT THERMOSTATIC SET
CODE: 484000440



ANGULAR THERMOSTATIC SET
CODE: 484000450



CORNER THERMOSTATIC VALVE
CODE: 484000460



DIRECT THERMOSTATIC VALVE
CODE: 484000470



CLAMPING FITTINGS
FOR Cu
CODE: 484000530



CLAMPING FITTINGS
FOR AL/PE-X
CODE: 484000550

SENSITIVE INOX
THERMOSTATIC HEAD INOX
CODE: 484000370



CORNER THERMOSTATIC SET
CODE: 484000480



DIRECT THERMOSTATIC SET
CODE: 484000490



ANGULAR THERMOSTATIC SET
CODE: 484000500



CORNER THERMOSTATIC VALVE
CODE: 484000510



DIRECT THERMOSTATIC VALVE
CODE: 484000520



CLAMPING FITTINGS
FOR Cu
CODE: 484000540



CLAMPING FITTINGS
FOR AL/PE-X
CODE: 484000560

SENSITIVE WHITE
THERMOSTATIC HEAD
CODE: 484000350



CORNER THERMOSTATIC SET
CODE: 484000380



DIRECT THERMOSTATIC SET
CODE: 484000390



ANGULAR THERMOSTATIC SET
CODE: 484000400



CORNER THERMOSTATIC VALVE
CODE: 484000410



DIRECT THERMOSTATIC VALVE
CODE: 484000420


FITTINGS CAN BE ORDERED AS A COMPLETE SET,
MORE INFORMATION AT THE SITE WWW.ISAN.CZ
INCLUDING CONNECTION EXAMPLES




color line: **RAL9016**
 tint: snow-white
 surface: -
 extra charge: -
 ordering code: 01



color line: **RAL9010**
 tint: white
 surface: -
 extra charge: -
 ordering code: 02




color line: **RAL9001**
 tint: ivory
 surface: -
 extra charge: 10 %
 ordering code: 04




color line: **RAL1015**
 tint: jasmine
 surface: -
 extra charge: 10 %
 ordering code: 12



color line: **S09**
 tint: snow-white
 surface: texture
 extra charge: 20 %
 ordering code: 68



color line: **S08**
 tint: ivory
 surface: texture
 extra charge: 20 %
 ordering code: 67




color line: **S07**
 tint: bamboo
 surface: -
 extra charge: 20 %
 ordering code: 66




color line: **S06**
 tint: sunshine
 surface: texture
 extra charge: 20 %
 ordering code: 65




color line: **S04**
 tint: gold
 surface: metallic
 extra charge: 30 %
 ordering code: 63




color line: **S18**
 tint: curry
 surface: texture
 extra charge: 20 %
 ordering code: 77



color line: **S16**
 tint: chilli
 surface: -
 extra charge: 20 %
 ordering code: 75




color line: **S17**
 tint: firebrick
 surface: texture
 extra charge: 20 %
 ordering code: 76



color line: **S13**
 tint: sandstone
 surface: texture
 extra charge: 20 %
 ordering code: 72




color line: **S14**
 tint: rush
 surface: texture
 extra charge: 20 %
 ordering code: 73




color line: **RAL6019**
 tint: pistachio
 surface: -
 extra charge: 10 %
 ordering code: 45



color line: **S12**
 tint: ice
 surface: texture
 extra charge: 20 %
 ordering code: 71




color line: **S11**
 tint: blue sky
 surface: -
 extra charge: 20 %
 ordering code: 70




color line: **S15**
 tint: steel blue
 surface: -
 extra charge: 20 %
 ordering code: 74



color line: **S20**
 tint: transparent paint
 surface: -
 extra charge: 20 %
 ordering code: 84



color line: **S03**
 tint: copper
 surface: metallic
 extra charge: 30 %
 ordering code: 62




color line: **S19**
 tint: brass
 surface: -
 extra charge: 20 %
 ordering code: 83




color line: **S01**
 tint: aluminium
 surface: metallic
 extra charge: 30 %
 ordering code: 60



color line: **S05**
 tint: silver
 surface: metallic
 extra charge: 30 %
 ordering code: 64




color line: **RAL9006**
 tint: grey
 surface: -
 extra charge: 10 %
 ordering code: 20



color line: **RAL7024**
 tint: dark grey
 surface: -
 extra charge: 10 %
 ordering code: 39



color line: **RAL8017**
 tint: chocolate
 surface: -
 extra charge: 10 %
 ordering code: 46




color line: **S10**
 tint: slate
 surface: texture
 extra charge: 20 %
 ordering code: 69



color line: **S02**
 tint: anthracit
 surface: metallic
 extra charge: 30 %
 ordering code: 61



color line: **RAL9005**
 tint: black
 surface: -
 extra charge: 10 %
 ordering code: 19




- There is limited guarantee for type of surface finish [84] transparent paint. Guarantee includes quality of product, corrosion damage due to leaking. Claim of surface finish - transparent paint is not accepted. Corrosion of steel on surface under the paint is standard.
- Print version of the colour card does not match the reality of the surface.

SURFACE TREATMENT

chrome
 ordering code: 80



inox
 ordering code: 81



satın
 ordering code: 82



Note: **satın[82]** same conditions like **chrome [80]**



AG Grzejniki Design i Systemy Grzewcze

ul. Bartycka 26 paw. 21 (teren Budexpo, przy bramie wyjazdowej)

00-716 Warszawa

tel. (pn-pt. 10-18, sb.10-15):

(+22) 397 43 92, (+22) 891 12 11

architekci@artykulygrzewcze.pl

AG Grzejniki Design

ul. Bartycka 20/24A pawilon 9A

00-716 Warszawa

tel. (pn-pt. 10-18, sb.10-15): (+22) 651 01 16

sklep@artykulygrzewcze.pl



Największy wybór grzejników dekoracyjnych w Polsce